


mono·mounts®

www.pizazzsystems.com

Panel Capacities

Aluminium Collection

Sizes and dimensions

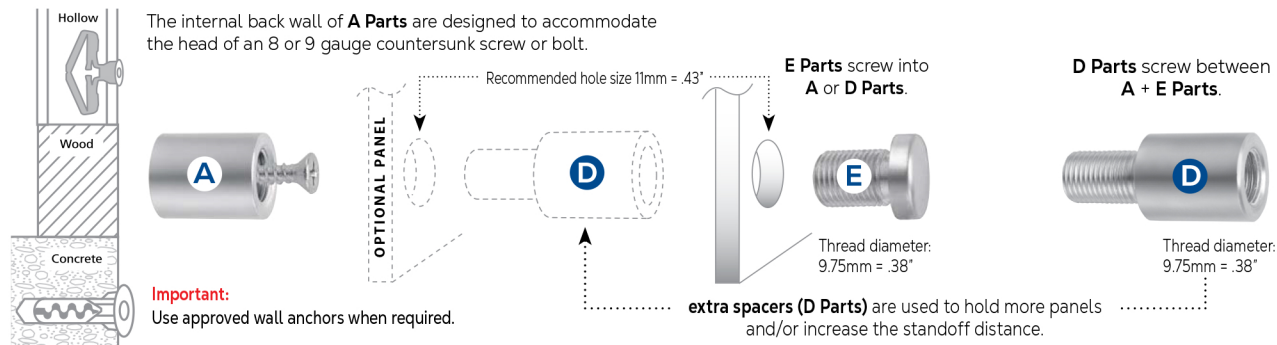

A+E Parts

Small

Max load per part
Max panel weight
Max panel thickness

Medium

Max load per part
Max panel weight
Max panel thickness

Large

Max load per part
Max panel weight
Max panel thickness

XL

Max load per part
Max panel weight
Max panel thickness

XXL

Max load per part
Max panel weight
Max panel thickness

Maximum part capacities E Parts

Metric

18 kgs
36 kgs
4mm

Imperial

39.6 lbs
79.2 lbs
.16"

Optional extra spacers D Parts

Metric

18 kgs
36 kgs
4mm

Imperial

39.6 lbs
79.2 lbs
.16"

IMPORTANT

- Maximum load per monomount should not exceed the maximum load per E Part.
- Maximum total load should not exceed the maximum panel weight.
- Maximum panel weight is fixed and does not increase with extra monomounts.

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.