

QUALITY AND
GUARANTEED
PERFORMANCE

pizazz


multi•mounts®

www.pizazzsystems.com

Panel Capacities

Aluminium Collection

Sizes and dimensions

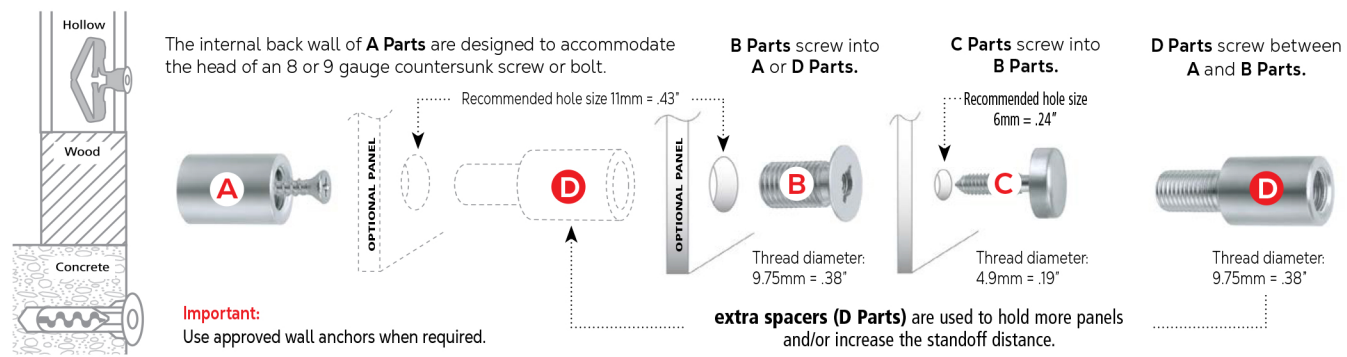

A+B+C Parts			Maximum capacities B Parts		Maximum capacities C Parts		Optional extra spacers D Parts	
Small			Metric	Imperial	Metric	Imperial	Metric	Imperial
Max load per part			12 kgs	26.4 lbs	10 kgs	22 lbs	12 kgs	26.4 lbs
Max panel weight			24 kgs	52.8 lbs	20 kgs	44 lbs	24 kgs	52.8 lbs
Max panel thickness			4mm	.16"	4mm	.16"	4mm	.16"
Medium								
Max load per part			16 kgs	35.2 lbs	10 kgs	22 lbs	16 kgs	35.2 lbs
Max panel weight			32 kgs	70.4 lbs	20 kgs	44 lbs	32 kgs	70.4 lbs
Max panel thickness			8mm	.31"	8mm	.31"	8mm	.31"
Large								
Max load per part			20 kgs	44 lbs	10 kgs	22 lbs	20 kgs	44 lbs
Max panel weight			40 kgs	88 lbs	20 kgs	44 lbs	40 kgs	88 lbs
Max panel thickness			12mm	.47"	10mm	.39"	12mm	.47"
XL								
Max load per part			24 kgs	52.8 lbs	10 kgs	22 lbs	24 kgs	52.8 lbs
Max panel weight			48 kgs	105.6 lbs	20 kgs	44 lbs	48 kgs	105.6 lbs
Max panel thickness			16mm	.63"	12mm	.47"	16mm	.63"
XXL								
Max load per part			28 kgs	61.6 lbs	10 kgs	22 lbs	28 kgs	61.6 lbs
Max panel weight			56 kgs	123.2 lbs	20 kgs	44 lbs	56 kgs	123.2 lbs
Max panel thickness			19mm	.75"	14mm	.55"	19mm	.75"

- IMPORTANT**

 - Maximum load per multimount should not exceed the maximum load per B Part.
 - Maximum total load should not exceed the maximum panel weight in the B Parts column.
 - Maximum panel weight is fixed and does not increase with extra multimounts.
- Installers must ensure that:**

 - Any of the limits detailed above are not exceeded.
 - A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
 - When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.