

TUFFAK® POLYCARBONATE SHEET FABRICATION GUIDE/ TECHNICAL MANUAL

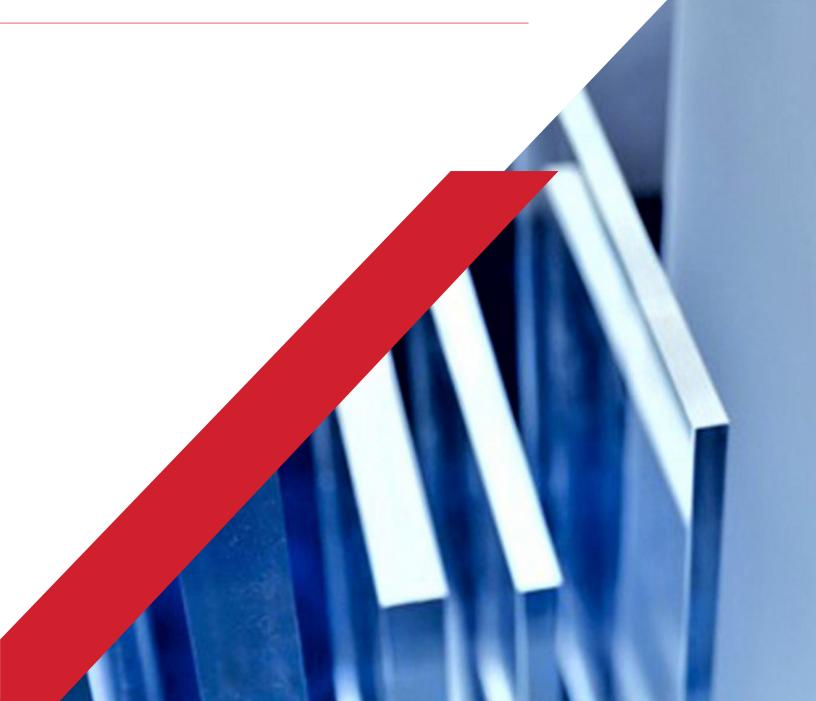


TABLE OF CONTENTS	Page
Introduction	3
Typical Properties	4
TUFFAK Product Selection Guide	5-8
Chemical / Environmental Resistance	9-15
Cleaning Recommendations	. 16-17
Fabrication / Machining	.18-23
Fabrication / Laminate & Heavy Gauge Sheet	24-27
Thermoforming	28-34
Troubleshooting Guide	35-43
Brake Bending, Cold Forming, Annealing	44-45
Bonding Applications	46-48
Mechanical Fastening	49-52
Finishing	53-55
Glazing Guidelines	.56-61
Notes	62-63



Contact Technical Service Group with additional questions: 800.848.9124 plaskolite@plaskolite.com

TUFFAK SHEET TYPICAL PROPERTIES*

Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D 792	-	1.2
Refractive Index	ASTM D 542	-	1.586
Light Transmission, Clear @ 0.118"	ASTM D 1003	%	86
Light Transmission, I30 Gray @ 0.118"	ASTM D 1003	%	50
Light Transmission, KO9 Bronze @ 0.118"	ASTM D 1003	%	50
Light Transmission, I35 Dark Gray @ 0.118"	ASTM D 1003	%	18
Water Absorption, 24 hours	ASTM D 570	%	0.15
Poisson's Ratio	ASTM E 132	-	0.38
MECHANICAL			
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Tensile Strength, Yield	ASTM D 638	psi	9,000
Tensile Modulus	ASTM D 638	psi	340,000
Elongation	ASTM D 638	%	110
Flexural Strength	ASTM D 790	psi	13,500
Flexural Modulus	ASTM D 790	psi	345,000
Compressive Strength	ASTM D 695	psi	12,500
Compressive Modulus	ASTM D 695	psi	345,000
Izod Impact Strength, Notched @ 0.125"	ASTM D 256	ft·lbs/in	18
Izod Impact Strength, Unnotched @ 0.125"	ASTM D 256	ft·lbs/in	60 (no break
Instrumented Impact @ 0.125"	ASTM D 3763	ft·lbs	47
Shear Strength, Ultimate	ASTM D 732	psi	10,000
Shear Strength, Yield	ASTM D 732	psi	6,000
Shear Modulus	ASTM D 732	psi	114,000
Rockwell Hardness	ASTM D 785	-	M70 / R118
THERMAL			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 × 10 ⁻⁵
Coefficient of Thermal Conductivity	ASTM C 177	BTU·in/hr·ft².°F	1.35
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	280
Brittleness Temperature from ductile to brittle	ASTM D 746	°F	-40200
Shading Coefficient, clear @ 0.236"	NFRC 100-2010	· · · · · · · · · · · · · · · · · · ·	0.97
Shading Coefficient, Gray or Bronze @ 0.236"	NFRC 100-2010	_	0.77
U factor @ 0.236" (summer, winter)	NFRC 100-2010	BTU/hr·ft².°F	0.85, 0.92
U factor @ 0.375" (summer, winter)	NFRC 100-2010	BTU/hr·ft²·°F	0.78, 0.85
ELECTRICAL			
Dielectric Constant @ 10 Hz	ASTM D 150	-	2.96
Dielectric Constant @ 60 Hz	ASTM D 150	-	3.17
Volume Resistivity	ASTM D 257	Ohm⋅cm	8.2×10^{16}
Dissipation Factor @ 60 Hz	ASTM D 150	-	0.0009
Arc Resistance			
Stainless Steel Strip electrode	ASTM D 495	Seconds	10
Tungsten Electrodes	ASTM D 495	Seconds	120
Dielectric Strength, in air @ 0.125"	ASTM D 149	V/mil	380

^{4 *}Typical properties are not intended for specification purposes.

TUFFAK PRODUCT SELECTION GUIDE

TUFFAK Grade	Key Product Features	Typical Applications
GP	High impact; clarity; and temperature resistant	Industrial glazing, machine guards, structural parts, thermoformed and fabricated components
GP Patterns	Pebble, matte and prismatic surface finishes	Industrial glazing, privacy glazing, signs, displays and lighting covers
ОР	Optical Quality	Face shields, laminates
FI	UL 94 V-0, 5VA; FAA rated; not UV stabilized	Electrical devices, equipment housings, switch- gear covers, and interior aircraft components
LF	UL 94 V-0; FAA rated; has UV stabilizer	Electrical devices, equipment housings, switchgear covers, light fixtures, aerospace components
FD	FDA/NSF compliant for food contact	Machine guards, bulk food bins, candy molds, sneeze guards, hospital trays, bassinets, incubators, and medical device storage containers
SL	Enhanced outdoor weathering performance	Flat and formed sign faces and channel letters
SL Matte	Enhanced outdoor weathering performance with matte texture	Flat and formed sign faces, channel letters and digital displays
LD	LED light diffusion; enhanced outdoor weathering performance	Flat and formed sign faces and channel letters using LEDs
NR	Non-reflective; UV resistant; proprietary matte surface; impact strength	Display and screen protection, signage, lenses, and menu boards with reduced glare
NR-C	Non-reflective; UV resistant; one side hard-coated; textured surface with improved chemical resistance and reduced glare	Display and screen protection, fuel dispensing systems, signage, lenses, and menu boards
UV	High optical quality; enhanced outdoor weathering performance and can be cold formed on site	Covered pedestrian walkways, entryway canopies, awnings, skylights, barrel vaults, glazed archways, and sloped, vertical, and curved glazing

TUFFAK Grade	Key Product Features	Typical Applications
SK	Smooth and prismatic pattern designed as inner lite of a dual domed skylight	Awning, skylights, entryway canopies, barrel vaults, sloped, vertical and curved glazing
SK1 & SK1 HD	Smooth and prismatic optimized to diffuse and distribute light with high light transmission; UV resistant	Awning, skylights, entryway canopies, barrel vaults, sloped, vertical and curved glazing
SK1 CC	Advanced IR blocking to reduce solar heat gain, maximizing visible light transmission; UV resistant	Awning, skylights, entryway canopies, barrel vaults, sloped, vertical and curved glazing
AR	Long lasting abrasion and chemical resistance, and outdoor weathering performance	Replacement glazing, industrial guarding, safety components
15	Long lasting abrasion and chemical resistance, and outdoor weathering performance; Fifteen (15) year limited product warranty	Architectural glazing for residential, retail, transportation centers, psychiatric facilities
AMGARD	AMGARD formulated with silver ion antimicrobial agent to protect against surface microorganism growth; tested to ISO 22196	Safety shields and barriers
AMGARD SR	AMGARD formulated with silver ion antimicrobial agent to protect against surface growth with scratch resistant coating; tested to ISO 22196	Scratch resistant safety shields and barriers
CA	Optical grade, UV stable sheet meeting ICB Class A flammability; passes NFPA 286	Wall cladding, ceiling finishes and decorative panels
CA-UV	Optical grade, UV enhanced sheet meeting ICB Class A flammability; passes NFPA 286	Exterior glazing and canopies
CA-AR	Abrasion resistant enhanced meeting IBC Class A flammability, passes NFPA 286	
AF	Two-sided coated product with Anti-Fog properties; meets ANSI Z87.1 (2020)	Personal protection safety shields, ski goggles, swim goggles, underwater photography equipment, face shields, industrial safety shields and firefighter helmets
FC	Cold formable and drape formable; meets ANSI Z26 .1 AS-6	Motorcycle and recreational vehicle windscreens, face shields, and formed applications

TUFFAK Grade	Key Product Features	Typical Applications
CG375, CG500, CG750	Meets ASTM F 1915; ASTM F 1233; H.P. White TP 0500	Jails, prisons, detention and psychiatric containment glazing
BR750	Meets UL 752 Level 1	Ballistic resistant glazing for government, institutional and commercial installations
BR1000	Meets UL 752 Level 2; ASTM F 1233; ASTM F 1915; H.P. White TP 0500	Ballistic resistant glazing for government, institutional, banks and commercial installations
BR1250	Meets UL 752 Level 3; NIJ Level II, IIIA; ASTM F 1233; ASTM F 1915; H.P. White TP 0500	Ballistic resistant glazing for government, institutional, banks and and commercial installations
MS1250	Meets UL 752 Level 6 rating; multi-shot 9 mm (Uzi) ballistic attack and supplementary shotgun	Ballistic resistant glazing for severe threat
Lumen XT	Superior LED and conventional light diffusion; wide range of diffusion levels; meets UL 94 V-0, 5VA	Interior LED and conventional lighting fixtures
Lumen XT-V	Superior LED and conventional light diffusion; wide range of diffusion levels; meets UL 94 V-0, 5VA	Interior LED and conventional lighting fixtures
DX-NR	Specifically formulated for superior LED light diffusion with enhanced weathering performance	Exterior LED and conventional lighting fixtures
IR	Meets welding shades 3 and 5; complies with ANSI Z87.1, EN 169: CSA Z94.3	Face shields for flame welding and cutting, general IR protection, welding curtain
LS	Available in IR, Visible and UV laser blocking tints; certified to ANSI Z136.7	Door and room windows, standing panels and screens, modular barriers and enclosures where reflective laser light blocking is required
WC	Effectively blocks 100% of harmful UV light, hazardous blue-light, a common cause of "welder arc-eye"; complies with AWS F2:3M:2011	Welding curtains, screens, booths, enclosures and walkways, tanning salons screens and other high UV and visible lighted areas
MG	0.750" - 2.0" thick for machining, textured surface	Machined parts such as manifolds, insulators, diaphragms, electrical, semiconductor, military applications

TUFFAK Grade	Key Product Features	Typical Applications
WG	0.750" - 2.0" thick, transparent	Sight windows for tanks/vessels, viewports, medical parts, military applications
AU	UV and abrasion resistant; ultra-clear; high visible light transmission	Specialty laminates
UC	High light transmission; and high optical quality	Military aircraft canopies, specialty laminates
SQ	High optical quality	High optical quality with specifications tailored to end-use application
HV	UV and abrasion resistant; high optical quality thick gauge sheet; meets ANSI Z26.1 AS-4	Forestry equipment, agricultural and industrial vehicle glazing
тх	Extended UV and abrasion resistant glazing for windows; meets ANSI Z26.1 AS-4 and FMVSS 302	RV, construction, and commercial truck rear windows
BG	UV and abrasion resistant; optical performance meets ANSI Z26.1 AS-4 and FMVSS 302	Bus window glazing
DG	High optics, abrasion resistant for driver guard; conforms to FMVSS 205/ANSI Z26.1. AS4	Transportation approved glazing for use as protective bus driver surrounds
TG	High optical performance with enhanced UV and abrasion resistance; meets FRA 49 CFR 223 & 49 CFR 238 for flammability, smoke, ballistics, and impact	Passenger rail car glazing
Marine 5	High optical clarity; low optical distortion; UV, abrasion, and chemical resistant	Marine flexible enclosures, tent and awning enclosures
VR	High optical quality; low optical distortion; high clarity; enhanced UV resistance	Marine flexible enclosures, tent and awning enclosures
AL	High optical quality; abrasion, chemical and UV resistant	Automotive laminates



The chemical and environmental resistance of TUFFAK depends on the unique combination of factors and variables it encounters in its application.

Outlined below is an overview of its primary outside influencers, and common types of potential damage. A summary of laboratory tests designed to meet its practical requirements. as well as its resistance to a wide range of chemicals and substances, is also provided.

Your Plaskolite Representative, with the support of our Technical Service Group, is available to work with you to evaluate your specific application.

Influencing parameters

TUFFAK properties are influenced chiefly by:

- » The composition of chemical ingredients
- » Temperature
- » Duration of exposure
- » The level of internal or applied stress and strain

Types of damage

TUFFAK can sustain several distinct types of damage, including swelling, dissolution, stress cracking and molecular degradation. Circumstances under which these potential types of damage can occur are detailed below. Different chemicals may act simultaneously on TUFFAK sheet causing one or more types of damage.

Swelling or dissolution

When low-molecular, aromatic, halogenated and polar components migrate into the polycarbonate, the damage can range from a tacky surface, to swelling, to complete dissolution.

Stress cracking

Even in small quantities, a number of chemicals can penetrate the surface of TUFFAK. This may result in stress cracks that affect the formed or fabricated part's appearance or mechanical properties.

With transparent grades of TUFFAK, stress cracks are generally easy to detect. In opaque grades, it may be difficult to detect them. Stress cracks can act like a notch, leading to significant deterioration in several mechanical properties, particularly impact, flexural and tensile performance. Laboratory tests such as impact or flexural strength can be used as indicators for mechanical property degradation.

Temperature and the duration of exposure are key influencers in the potential cracking of TUFFAK. As temperature rises, the time that elapses before damage occurs shortens. The exposure time required for initial damage ranges from a few seconds to more than 1000 hours due to the chemical involved, temperature, and stress level. For example, when formed or fabricated parts with pronounced stresses are immersed in aggressive solvents, stress cracks will occur in less than one minute.

It is possible for a component within a solid to migrate to polycarbonate through long-term contact and cause damage. One example is the contact between polycarbonate and plasticized PVC. Plasticizers within PVC, such as phthalates can trigger stress cracking and result in damage to the 10 polycarbonate.

Molecular degradation

Many of TUFFAK properties are determined by the size of its molecules. If an incompatible chemical causes a reduction in molecular weight, mechanical property degradation can occur. The molecular weight has virtually no influence on electrical properties and only a slight influence on thermal properties.

Solutions with a high pH (bases) can act to lower the molecular weight of polycarbonate. Low pH (acids) solutions typically do not degrade the molecular weight. Ammonia and amines are aggressive towards polycarbonate.

Plaskolite laboratories have tested a series of chemicals and commercial products to determine their compatibility with polycarbonate. The results of TUFFAK resistance to substances are included in the following table (pages 10-13).

Laboratory tests supply information on the formulation tested. The composition of many commercial products can change over time.

Oxidative damage

TUFFAK is relatively stable toward oxidizing agents such as oxygen, nitric acid, and hydrogen peroxide.

Resistance

TUFFAK's resistance to chemicals, common industrial cleaners, pharmaceuticals, household and cosmetic substances, is dependent on the ingredients in the product, as well as the temperature and duration of exposure. The following section provides a general overview of resistance to these commonly used materials. If you require additional information, please contact your Plaskolite representative.

» Resistance to sealing compounds, adhesives and plastics TUFFAK's resistance to sealants, adhesives and plastics is largely dependent on the presence of aggressive components, such as plasticizers (e.g., phthalates) or solvents, which can migrate into polycarbonate.

» Resistance to paints

Solvents in paints may cause stress cracking or swelling depending upon the solvent and the flash-off and drying conditions. It is possible to formulate paints with solvents that do not cause damage. In some applications, painting can increase the chemical resistance of the finished part.

Two component paints are resistant if the individual components do not cause damage to TUFFAK in the short period between the application and curing. The SDS can be used to identify the chemical composition of the paint.

» Resistance to cleaning and washing agents

TUFFAK is resistant to most household soaps but not those containing amines, ammonia and sodium hydroxide.

» Resistance to disinfectants, drugs and cosmetics

TUFFAK may be damaged by disinfectants, drugs and cosmetics, which contain solvents or active ingredients that are incompatible with polycarbonate. For example, nail polish and nail polish remover will cause damage to the material.

If the product ingredients are known, it is possible to estimate the compatibility with TUFFAK. However, it is recommended to put the finished part through a practical test if no data is available. Refer to the compatibility table (pages 10-13) for resistance levels.

Testing to meet practical requirements

The compatibility information presented in this section should be used as a starting point for determining the integrity and durability of your application. Testing is essential if finished TUFFAK components are likely to encounter aggressive chemicals during use. The internal and applied stress in a formed or fabricated part, as well as duration of chemical exposure, can lead to very different results.

Compatibility assessment methods

The data shown in the compatibility table (pages 10-13) was generated using DIN 53449-3. This method uses test pieces of $80 \times 10 \times 4$ mm TUFFAK sheet clamped to a curved fixture. The fixture applies a graduated strain ranging from 0 to 2%.

Assessment criteria

The information in the compatibility table is based on exposure to chemicals at 23°C and a range from 0-2% strain. Components that lead to damage with a strain of $\boldsymbol{\epsilon}$ < 1.0 % are classified as incompatible.

The results shown in the following tables are based on a one-time test. Change in the composition by the producers of these substances can change the results.

Please contact your Plaskolite representative or the Technical Service Group at 800.628.5084 with any questions, or if you require additional information.

Legend

Explanation of the symbols:

- + Resistant
- O Partially resistant
- Not Resistant

Chemicals

Acetaldehyde	-
Acetic acid, up to 10% solution	+
Acetone	-
Acetylene	+
Acrylonitrile	-
Allylalcohol	0
Alum	+
Aluminum chloride, saturated aqueous solution	+
Aluminum oxalate	+
Aluminum sulphate, saturated aqueous solution	+
Ammonia	-
Ammoniacal liquor	-
Ammonium chloride, saturated aqueous solution	0
Ammonium nitrate, saturated aqueous solution	0
Ammonium sulphate, saturated aqueous solution	0
Ammonium sulphide, saturated aqueous solution	-
Amylo acetate	-
Aniline	-
Antimony chloride, saturated aqueous solution	+
Arsenic acid, 20% solution	+
Benzaldehyde	-
Benzene	-
Benzoic acid	-
Benzyl alcohol	-
Borax, saturated aqueous solution	+
Boric acid	+
Bromic benzene	-
Bromine	-
Butane (liquid or gaseous)	+
Butyl acetate	-
Butanol	+
Butylene glycol	+
Butyric acid	-
Calcium chloride, saturated aqueous solution	+
Calcium hypochloride	+
Calcium nitrate, saturated aqueous solution	+
Calcium-soap, fat/pure	+
Carbon acid, wet	+
Carbon monoxide	+
Chlorine benzene	-
Chlorine gas, dry	0
Chlorine gas, wet	-
Chlorine lime slurry	+

Chlorine lime, 2% in water	+
Chloroform	
Chrom alum, saturated aqueous solution	+
Chromic acid, 20% in water	+
Citric acid	+
Copper sulphate, saturated aqueous solution	+
Cresol	
Cupric chloride, saturated aqueous solution	+
Cuprous chloride, saturated aqueous solution	+
Cyclo hexane	
Cyclo hexanol	0
Cyclo hexanone	
Dekaline	+
Diamyl phthalate	
Dibutyl phthalate (plasticizer)	-
Diethylene glykol	+
Diethylether	-
Diglycolic acid, saturated aqueous solution	+
Dimethyl formamide	-
Dinonyl phthalate (plasticizer)	0
Dioctyl phthalate (plasticizer)	0
Dioxane	-
Diphyl 5, 3	0
Ether	-
Ethyl alcohol, 96% pure	0
Ethyl amine	-
Ethyl bromide	-
Ethylene chlorohydrine	-
Ethylene chloride	-
Ethylene glykol	+
Ferritrichloride, saturated aqueous solution	+
Ferro bisulphate	+
Formaline, 10%ig	+
Formic acid, 30%	0
Gasoline	0
Glycerine	0
Glycol	+
Heptane	+
Hexane	+
Hydrochloric acid, 20%	+
Hydrochloric acid, conc.	-
Hydrofluoric acid, 5%	+
Hydrofluoric acid, conc.	-
Hydrofluorosilicic acid, 30%	+
Hydrogen peroxide, 30%	+
lodine	-
Isoamyl alcohol	0
Isopropyl alcohol	+
Lactic acid, 10% in water	+
Lead tetraethylene, 10% in gasoline	0
Lighting gas	0
·	

Ligroin (hydrocarbon compound)	+
Lime milk, 30% in water	0
Magnesium chloride, saturated aqueous solution	+
Magnesium sulphate, saturated aqueous solution	+
Manganous sulphate, saturated aqueous solution	+
Mercuro chloride, saturated aqueous solution	+
Mercury	+
Methacrylic acid-methyester (MMA)	-
Methane	+
Methanol	-
Methyl amine	-
Methyl ethyl ketone (MEK)	-
Methylene chloride	-
Nitric acid, 10%	+
Nitric acid, 10-20%	0
Nitric acid, 20%	-
Nitric Gas, dry	-
Nitrobenzene	_
Oxalic acid, 10% in water	+
Oxygen	+
Ozone	+
Pentane	+
Perchloric acid, 10% in water	+
Perchloric acid, concentrated	0
Perchloro ethylene	
Perhydrol, 30%	+
Petroleum	0
Petroleum ether	0
Petroleum spirit	+
Phenol	<u> </u>
Phenyl ethyl alcohol	
Phosphor trichloride	-
Phosphoric acid, conc.	+
Phosphoric oxichloride	
Potassium aluminum sulpate, saturated aqueous solution	+
Potassium bichromate, saturated aqueous solution	+
Potassium bromide, saturated aqueous solution	+
Potassium carbonate, saturated aqueous solution	+
Potassium chloride, saturated aqueous solution	+
Potassium cyanide	_
Potassium hydroxide	
Potassium metabisulphide, 4% in water	+
Potassium nitrate, saturated aqueous solution	+
Potassium perchlorate, 10% in water	+
Potassium permanganate, 10% in water	+
Potassium persulphate, 10% in water	+
Potassium rhodanide, saturated aqueous solution	+
Potassium sulphate, saturated aqueous solution	+
Propane gas	+
Propargyl alcohol	+
Propionic acid, 20%	+
- · · · · · · · · · · · · · · · · · · ·	

Propionic acid, conc.	-
Propyl alcohol	+
Pyridine	-
Resorcin oil solution, 1%	+
Carbon disulphide	
Hydrogen sulphide	+
Soda	+
Sodium bicarbonate, saturated aqueous solution	+
Sodium bisulphate, saturated aqueous solution	+
Sodium bisulphide, saturated aqueous solution	+
Sodium carbonate, saturated aqueous solution	+
Sodium chlorate, saturated aqueous solution	+
Sodium chloride, saturated aqueous solution	+
Sodium hydroxide	-
Sodium hypochloride, 5% in water	+
Sodium sulphate, saturated aqueous solution	+
Sodium sulphide, saturated aqueous solution	0
Styrene	-
Sublimate, saturated aqueous solution	+
Sulphur	+
Sulphur dioxide	0
Sulphuric acid, 50%	+
Sulphuric acid, 70%	0
Sulphuric acid, conc.	-
Sulphurous acid, 10%	-
Sulphuryl chloride	-
Tartaric acid, 10%	+
Tetrachlorocarbon	-
Tetrachloroethane	-
Tetrahydrofurane	-
Tetraline	-
Thiophene	-
Toluene	-
Trichloro acetic acid, 10%	0
Trichloroethyl amine	-
Trichloroethyl phosphate (plasticizer)	0
Trichloroethylene	-
Tricresyl phosphate (plasticizer)	-
Urea, saturated aqueous solution	-
Water	+
Xylene	-
Zinc chloride, saturated aqueous solution	+
Zinc oxide	+
Zinc sulphate, saturated aqueous solution	+

Disinfectants

Accel TB	-
Baktol®, 5%	+
Carbolic acid	-
Chloroamine	-
Clorox® BROAD SPECTRUM Quaternary Disinfectant Cleaner	-
Clorox® Healthcare FUZION Cleaner Disinfectant	-
Clorox® Healthcare Bleach Germicidal Cleaner	-
Delegol®, 5%	+
Dimamin T, 5%	0
Hydrogen peroxide	+
lodine tincture	0
Lysoform, 2%	+
Lysol® Brand III Disinfectant Spray (original)	-
Maktol®	+
Merfen®, 2%	+
Oktozon®, 1%	+
PDI® Super Sani-Cloth® Disposable Wipes	-
Perhydrol	+
PeridoxRTU® Sporicidal Disinfectant	-
Resorcinol solutions, 1%	+
Safetec Surface Safe Wipes	-
Sagrotan®, 5%	0
Spirit, pure	+
Steriplex® SD	-
Sublimate	+
TB-Lysoform	-
Trosilin G extra®, 1, 5%	+
ZEP® 40 Non-Streaking Cleaner	-
ZEP® SPIRIT II	-
Zephirol®	0

Pharmaceutics and cosmetics

Blood plasma	+
Delial-Sunmilk®	+
Botanicare® Hydroplex	+
lodine tincture	0
Klosterbalsam	+
Lanoline	+
Menthol, 90% in Alcohol	0
Nail polish	-
Nail polish remover	-
Odol-mouthwash®	+
Periston blood substitute®	+
Vaseline	+
Vicks® VapoRub®	+

Nutrition

Allspice	-
Apple juice	+
Beef sebum	+
Beer	+
Beets syrup	+
Brandy, 38%	+
Butter	+
Chocolate	+
Cinnamon	+
Clove	-
Cod-liver oil	+
Coffee	+
Common salt	+
Fish	+
Fruit juice	+
Fruit syrup (Raspberry)	+
Gherkins	+
Grape sugar	+
Grapefruit juice	+
Juniper berry	+
Lard	0
Linseed oil	+
Liquor	+
Margarine	+
Meat	+
Milk	+
Mineral water	+
Mustard	+
Nutmeg	-
Onion	+
Orange juice	+
Paprika	+
Pepper	+
Rum	+
Salad oil	+
Syrup	+
Sugar solution, saturated aqueous solution	+
Tea	+
Tobacco	+
Tomato juice	+
Tomato puree	+
Vanilla	+
Vegetable juice	+
Vegetable oils	+
Vinegar	+
Vodka	+
Water	+
Wine	+
Worcestershire sauce	+

Washing and cleaning agents

Household soap	+
Dawn® Dishwashing Soap	+
Joy [®]	+
Palmolive Liquid®	+

Technical oils and fats

Camphor oil	-
Castor oil	+
Cod-liver oil	+
Drilling oil	-
Fish oil	+
Fuel oil	0
Lubricant based on paraffin	+
Paraffin oil	+
Sodium soap fat	+

Miscellaneous

Battery acid	+
Blood	+
Castor oil	+
Dry cured cement	+
Freon® 113	+
Gasoline	0
Natural rubber	+
Oleic acid, conc.	+
Polishing wax	+
Polyethylene	+
Polyvinylchloride, (containing plasticizer)	0
Sea water	+
Starch	+
Weak acid >4.7 pH	+
Weak base <9.5 pH	-
Tannic acid	-

CLEANING RECOMMENDATIONS

CLEANING RECOMMENDATIONS

TUFFAK cleaning instructions

Periodic cleaning of TUFFAK is recommended to prolong the service life of your material. To minimize the risk of damage, use only compatible household cleaners and correct cleaning procedures as outlined below.

TUFFAK GP polycarbonate mars easily with wiping action. TUFFAK 15, TUFFAK AR, and Hygard laminate sheets are hard coated, abrasion and mar resistant polycarbonate products that offer a high degree of surface hardness and abrasion resistance. These products provide superior protection against unintentional chemical attack. However, the use of abrasive, gritty cleaners or hard cleaning implements (e.g., hard brushes, scrapers, squeegees) should be avoided to eliminate the possibility of scratching the coating.

Compatible cleaners

The following cleaning agents are compatible with TUFFAK polycarbonate sheet products when used according to the manufacturer's recommendations:

- » Dawn® Dishwashing Soap
- » Joy®
- » Palmolive Liquid®
- » Windex® Ammonia free

Top Job and Joy are registered trademarks of Proctor & Gamble, Palmolive is a registered trademark of Colgate Palmolive, Windex is a registered trademark of Drackett Products.

General cleaning instructions:

- » Thoroughly pre-rinse with warm water to loosen and wash away surface residue, grit and grime.
- » Using a soft microfiber cloth or moist non-abrasive sponge, gently wash with a mild diluted soap or detergent.
- » Rinse thoroughly with lukewarm, clean water. To prevent water spots, thoroughly dry the glazing with a dry soft cloth.

Removing heavy oils and tars:

- » Thoroughly pre-rinse with warm water to loosen and wash away surface residue, grit and grime.
- » With a 50/50 isopropyl alcohol-water mixture, gently rub the area with a soft non-abrasive cloth.
- » Immediately rinse thoroughly with lukewarm clean water. To prevent water spots, thoroughly dry the glazing with a dry soft cloth.

Removing graffiti, paint, marker, inks and glazing compounds:

- » Thoroughly pre-rinse with warm water to loosen and wash away surface residue, grit and grime.
- » Using Naphtha VM&P grade, Isopropyl Alcohol or Butyl Cellosolve™, gently rub the area with a soft, non-abrasive cloth. Do not apply solvent cleaners under direct sunlight or during high temperatures.
- » Immediately rinse thoroughly with lukewarm clean water. To prevent water spots, thoroughly dry the glazing with a dry soft cloth.

Removing adhesive-backed labels:

- » Isopropyl Alcohol, Naphtha VM&P grade or Kerosene will help lift stickers and adhesives.
- » Immediately rinse thoroughly with lukewarm clean water. To prevent water spots, thoroughly dry the glazing with a dry soft cloth

Important reminders

- » Do not clean TUFFAK with any cleaners other than those on the approved, compatible list included in this guide, or those tested and found compatible.
- » Do not use abrasive cleaners.
- » Do not use high alkaline cleaners (high pH or ammoniated).
- » Do not leave cleaners sitting on TUFFAK for periods of time; rinse off immediately.
- » Do not apply cleaners under direct sunlight or at elevated temperatures.
- » Do not use scrapers, squeegees, razors or other sharp instruments as they may permanently scratch TUFFAK.
- » Do not dry rub or dry clean TUFFAK, as sand and dust particles clinging to the exterior of the glazing may scratch its surface. An Anti-Static Canned-Air Ionizer can reduce electro static charge buildup on TUFFAK, and aids in reducing dirt and dust buildup that can hinder cleaning.

Contact the Plaskolite Technical Service Group at 800.628.5084 with any questions.

TECH TIP:

The edges of coated polycarbonate sheet are not protected with an abrasion and chemical resistant hard coating. Do not allow cleaning solutions and solvents to pool along the edges for any length of time. Always rinse edges thoroughly with generous amounts of lukewarm clean water.

Removing scratches

Deep scratches and gouges made by sharp objects such as keys, screwdrivers, and knives cannot be repaired. Fine scratches may be reduced in severity or cosmetically hidden by using a buffing compound such as NOVUS® 2 Plastic Fine Scratch Remover, followed by a cleaning and polishing agent like NOVUS® 1. However, for abrasion resistant coated products, buffing the surface is not recommended. Buffing these scratched sites worsen the condition and further damage the coating. Once the coating is removed, it cannot be repaired and buffing may optically distort the window.

FABRICATION - IINTRODUCTION

Cutters

TUFFAK sheet products easily fabricate using standard cutting tools. Carbide-tipped cutters are recommended. Always use properly sized, sharp cutting tools.

Cooling

Cooling TUFFAK sheet while fabricating is not typically required. In the event of localized overheating when fabricating, only use compressed air or water mist. Avoid cutting fluids of any type. The additives in these products are largely incompatible and can cause chemical stress cracking.

TECH TIP:

Wear eye protection, and ensure equipment has safety guarding. Stock feed rates must be carefully controlled as an excessive rate causes vibration and may crack the part.

Dimensional accuracy

The rate at which TUFFAK sheet expands is higher than materials such as glass and metal. It has a movement rate of 0.060" per 12 inches of linear dimensions, over a 70°F temperature change. As a result, the dimensions should always be checked at room temperature.

Protective masking

TUFFAK sheet comes with protective masking. This film guards against surface damage during shipment/handling as well as fabrication. This masking should be left on during fabrication.

Masking cannot withstand direct outdoor exposure for prolonged periods and must be removed soon after installation. If not removed, the film will eventually degrade and may be difficult or impossible to remove. Storing sheet outdoors is not recommended for this reason.

Remove the masking prior to doing any type of heat processing; for further guidance on this subject please contact Plaskolite Technical Service Group for more information.


SAWING, SHEARING, DRILLING, MILLING, ROUTING, DIE CUTTING/PUNCHING

CIRCULAR SAWING

As shown in the accompanying illustration, use a carbide-tipped, circular saw blade with triple-chip tooth design, which cuts clean and lasts longer than high strength steel. Blade is hollowground and slotted for expansion and cooling.

The blade cutting speed should be 5000-6000 ft/min, and the table saw setup gap (between saw blade and bed) must be kept to a minimum for clean cuts.

Circular saw blade and cutting Cutting speed (ft/min) 5000 - 6000 4" Blade 8 - 10 teeth/inch 8 - 10" Blades 6 - 8 teeth/inch

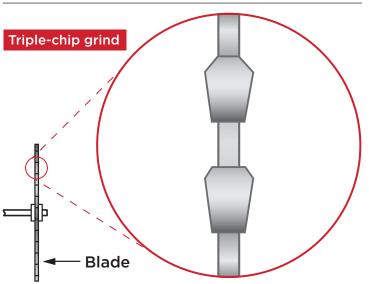

Circular saw troubleshooting

PROBLEM: Melting or Gummed Edges

SUGGESTED SOLUTIONS:

- 1. Increase blade tooth size
- 2. Reduce saw speed
- 3. Increase feed rate
- 4. Use compressed air to cool blade
- 5. Inspect blade for sharpness
- 6. Check blade-fence alignment
- 7. Reduce number of sheets in stack

PROBLEM: Chipping

SUGGESTED SOLUTIONS:

- 1. Decrease blade tooth size
- 2. Increase saw size
- 3. Provide better clamping/support for sheet stack
- 4. Reduce feed rate
- 5. Check blade and arbor for wobble
- 6. Inspect blade for sharpness

Circular saw blade suppliers:

Dino Saw Company

340 Power Ave. Hudson, NY 12534 518 828-9942

www.dinosaw.com

General Saw Corp.

2518 Andalusia Blvd. Cape Coral, FL 33909 800 772-3691

www.peaktoolworks.com

FTM, Inc.

327 Industrial Drive Placerville, CA 95667 530 626-1986

www.fabricationtoolsandmaterials.com

BAND SAWING

Band sawing is preferred for cutting contour and irregular shapes.

General guidelines:

- » Use precision or standard blades for sheet and parts made from thin gauge
- » Use buttress or skip-tooth blades for sheets thicker than 1/8 inch
- » Choose band-saw blades with generous set to reduce friction and heat buildup
- » Cool the cut junction with air or a water mist
- » Control the feed rate carefully to prevent binding and gumming
- » Use saw guides whenever possible

Band saw troubleshooting

PROBLEM: Melting or Gummed Edges


SUGGESTED SOLUTIONS:

- 1. Increase blade tooth size
- 2. Reduce saw speed
- 3. Use compressed air to cool blade
- 4. Check blade sharpness

PROBLEM: Chipping

SUGGESTED SOLUTIONS:

- 1. Decrease blade tooth size
- 2. Slow down stock feed rate
- 3. Provide better clamping/support to eliminate vibration
- 4. Check blade sharpness

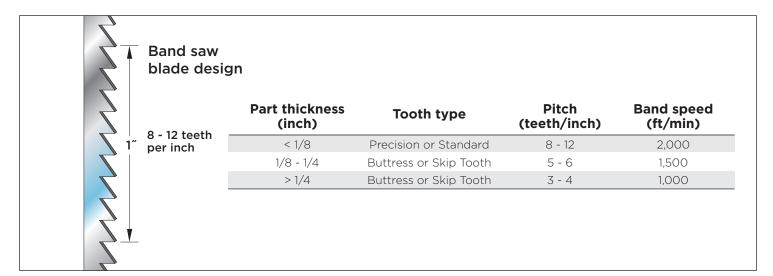


SHEARING

TUFFAK sheet up to 1/4 inch thick can be sheared. Sheared edges have a burred and rolled cut that is highly stressed and should be saw trimmed to prevent future cracking.

Important considerations for shearing:

- » A guillotine blade on a fixed bed cuts a cleaner edge than a two blade shear
- » 45-degree rake angle blade recommended
- » Clearance between the blade and bed should be no more than 0.001-0.002 inch
- » If cracks develop upon shearing, consider warming the material first; inspect blade
- » Shearing flame retardant product is not recommended as the additives in the sheet reduce its ductility. Warming material may help prevent cracking but does not guarantee success

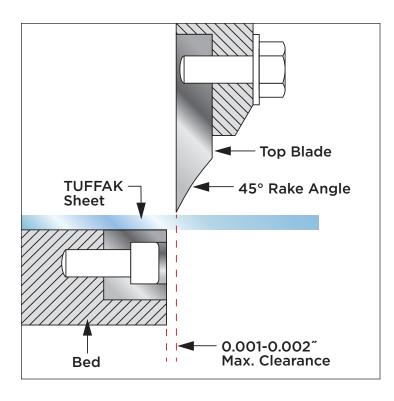

DRILLING


While standard drills and bits can be used with TUFFAK sheet, those specifically designed for plastics perform with greatest precision. They have wide, polished flutes to reduce friction, as well as spiral or helix designs to remove chips quickly.

- » Drill-point angles typically range between 60 and 90 degrees
 - Smaller angles for smaller holes and larger angles for larger holes
- » Drilling speeds range between 100 and 200 feet per minute, however feed rates can be increased under ideal conditions of proper cooling, sharp drills and efficient chip removal


General guidelines for drilling TUFFAK sheet:

- » Use carbide-tipped drills, they resist gumming and maintain edge sharpness longer than standard drills
- » Drill holes slightly oversized
- » Allow distance between sheet edge and drilled hole to be at least two times the diameter of hole
- » Do not use cutting fluids; use cool forced air
- » Countersink is not recommended, counter-bore is acceptable

 $a > 2 \times \emptyset$ drilled hole



Drill bit design

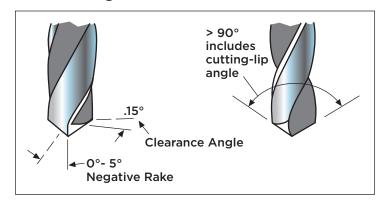

Drill (inch)	Feed (inch/rev)	Drill speed (RPM)
Up to 1/8	0.001 - 0.002	1750
1/8 to 1/4	0.002 - 0.004	1750 - 1500
1/4 to 1/2	0.004 - 0.006	1500 - 500
1/2 to 1	0.006 - 0.008	500 - 350

Common drilling problems and remedies

Problem	Probable cause	Remedy
Hole too large	Unequal angle on length of cutting edge Burr on drill	Properly regrind drill Properly regrind drill
Rough or burred hole	1. Dull drill 2. Improperly ground drill 3. Too fast feed	1. Regrind properly 2. Regrind properly 3. Reduce feed
Breaking of drill	 Feed too fast in relation to spindle speed Dull drill-grabs in work Inadequate chip cleaning 	 Reduce feed or increase speed Regrind drill Check application setup
Chipping of high-speed drill	 Improper heat treatment after regrinding Too coarse feed 	 Follow manufacturers' recommendations Reduce feed

Specialty drill bit suppliers:		
Onsrud Cutter	Craftics, Inc.	FTM, Inc.
1081 S. Northpoint Blvd.	2804 Richmond Dr.	327 Industrial Drive
Waukegan, IL 60085	Albuquerque, NM 87107	Placerville, CA 95667
800 234.1560	505 338.0005	530 626-1986
www.onsrud.com	www.craftics.net	www.fabricationtoolsandmaterials.con

MILLING

Milling is used to remove large volumes of plastic with relatively high accuracy and precision. Mounted in a drill press, an end mill can plunge repeatedly to a preset depth to produce parts that are flush and smoothly trimmed. For best results, use high-speed end mills with four cutting flutes and a 15-degree rake angle. Always keep mills sharp and well-polished to reduce friction.

Milling TUFFAK sheet typically works best at feed speeds of 5–10 inches/minute and cutting speeds of between 100–200 inches/minute.

Carbide cutters generally provide smoother finishes and allow for higher feed rates. Special cutters designed specifically for plastics produce the smoothest finishes at the fastest feed rates. Check with your cutter supplier for the latest designs for polycarbonate.

Consider the following when milling TUFFAK sheet:

- » Excessive feed rates can cause rough surfaces
- » Insufficient feed rates can generate too much heat and cause part melting, distortion or poor surface quality
- » Compressed air stream or water mist helps to remove heat and prevent buildup
- » Improper milling can induce high stress levels, causing future problems

TECH TIP:

Consider removing the protective masking on sheets prior to milling a part. Cutting bits may lift film masking causing it to 'ball up' around the tool. Paper masking offers the highest adhesion level on polycarbonate and greatly reduces the risk of the film masking winding itself around the tool during fabrication.


Annealing milled parts reduces machining stresses and are known to lessen the chance of stress crack development.


ROUTING

Router cutting produces a smooth edge on TUFFAK sheet and easily cuts curved or irregular shapes. Use a recommended router speed of 20,000-25,000 rpm, with straight 2- or 3-fluted carbide-tipped or high-speed bits with diameters 1/4 inch to 1/2 inch.

General guidelines for router cutting TUFFAK sheet:

Router bit design		
Clearance angle	5 - 10°	
Rake angle	O - 10°	
Cutting speed (rpm)	20,000 - 25,000	

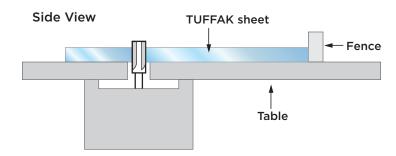

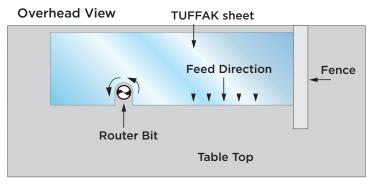

Important: Feed the sheet against the router bit rotation and use a fence for sizing when making straight cuts.

Specialty router bit suppliers:

Onsrud Cutter

1081 S. Northpoint Blvd. Waukegan, IL 60085 800 234.1560

www.onsrud.com

Boshco, Inc.

2 Sterling Road North Billerica, MA 01862 978 667.1911

www.boshco-dustek.com

Dino Saw Company 340 Power Ave.

Hudson, NY 12534 518 828-9942

www.dinosaw.com

DIE CUTTING / PUNCHING

Types of dies used in cutting TUFFAK sheet include steel-rule, punch and clicker in gauges up to 0.080 inch. Steel-rule dies trim lighter-gauge parts and clicker dies perform heavier-gauge cuts and continuous cuts in sheet. To obtain a clean cut in most applications, maintain a clearance between the punch and die of about 0.005 inches.

General guidelines when die cutting, punching or blanking TUFFAK sheet:

- » For best results, consider warming the part first before die cutting, punching or blanking
- » Maintain sharp cutting edges for cleanest cut and to avoid creating notches and scratches that could later act as stress concentrators
- » Avoid sharp radii in the corners of non-circular cut-outs
- » Die cutting, punching or blanking parts made of flame retardant grade sheet is not recommended

Use 3 pt (0.042") thick steel to fabricate steel-rule die. Flush or center bevel-ground rule provides a clean cut. Facet-ground steel rule is used to cut >0.060 inch TUFFAK sheet. The center bevel rule is the most common and provides the longest life in terms of wear. Cleaner cuts can be attained by using a facet bevel rule. The longer bevel reduces material displacement, especially with thick material, while the broad tip remains sharp. The flush bevel rule also provides clean cuts, but has a weak tip


that is susceptible to roll-over. To maximize both cut quality and rule longevity, the side bevel rule is recommended.

Laser

Laser cutting TUFFAK can lead to slight discoloration in the cut edge. Contact your laser equipment manufacturer for additional advice on laser settings for cutting or marking of polycarbonate. Adhere to proper safety procedures when laser cutting. The work should be performed in a space with exhaust hoods and good ventilation.

TECH TIP:

TUFFAK sheet should be stored in a well-protected, ventilated area with no direct exposure to sunlight or harsh weather conditions. If temporarily stored outdoors, sheets should be covered with a heat reflecting, opaque covering.

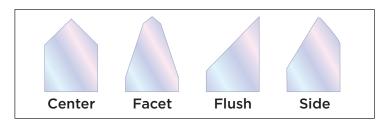



FABRICATION – LAMINATE & HEAVY GAUGE SHEET

TECH TIP:

TECH TIP:

Hygard® laminates and TUFFAK WG and MG plate products are designed for heavy fabrication.

It is possible to fabricate parts with tight tolerance design using standard cutting tools. Use carbide-tipped cutters for greater duability and a cleaner cut edge. Leave the masking on the product while fabricating to protect against surface damage. Remove masking soon after installation as prolonged outdoor exposure degrades the film making it difficult or impossible to remove.

Proper fabricating practices are especially important when cutting parts intended for security applications. This ensures product integrity with respect to strength properties and performance ratings. Sharp cutting tools are important, as is feed rate control. To avoid material overheating, decrease cutting speed and feed rate.

Laser cutting of HYGARD® laminates is not recommended due to increased stress level and higher risk for discolored edges. Water jet cutting of laminates is not recommended due to the potential or delamination.

The edges of HYGARD® laminates are not protected with

cleaning solutions and solvents to pool along the edges

generous amounts of lukewarm, clean water.


abrasion and chemical resistant hard coating. Do not allow

for any length of time. Always rinse edges thoroughly with

CIRCULAR SAWING

Use a carbide-tipped, circular saw blade with triple chip tooth design. It allows for cleaner cuts and greater durability than high- strength steel. Blade is hollow-ground, and slotted for expansion and cooling. Recommended blade cutting speed is 5000-6000 ft/min.

Circular saw blade and cutting		
Cutting speed (ft/min)	5000 - 6000	
Blade	~3 teeth/inch	

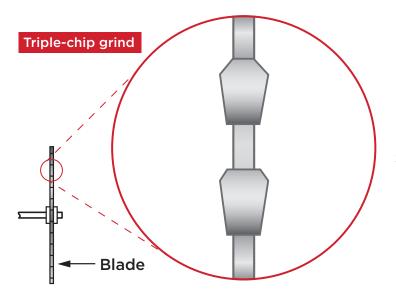

Circular saw troubleshooting

PROBLEM: Melting or Gummed Edges

SUGGESTED SOLUTIONS:

- 1. Increase blade tooth size
- 2. Reduce saw speed
- 3. Increase feed rate
- 4. Use compressed air to cool blade
- 5. Inspect blade for sharpness
- 6. Check blade-fence alignment
- 7. Reduce number of sheets in stack

PROBLEM: Chipping

SUGGESTED SOLUTIONS:


- 1. Decrease blade tooth size
- 2. Increase saw size
- 3. Provide better clamping/support for sheet stack
- 4. Reduce feed rate
- 5. Check blade and arbor for wobble
- 6. Inspect blade for sharpness

FABRICATION – LAMINATE & HEAVY GAUGE SHEET

BAND SAWING

Hygard laminates, TUFFAK WG and MG products, can be band saw cut with blades having 8-12 teeth per inch. Carefully choose feed rates and blade speed to avoid gumming or melting the plastic edge.

Pitch (teeth/inch)	Band speed (ft/min.)	Blade set (inch)
8 - 12	2500 - 3000	0.020 - 0.030

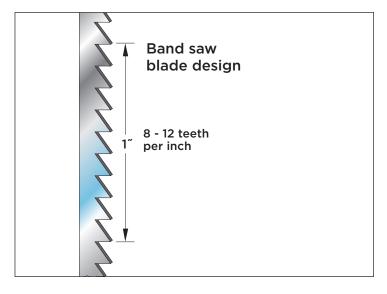

TECH TIP:


Solvent polishing edges of a laminated sheet is not recommended due to the possibility of the TPU bonding layer absorbing the solvent and swelling, resulting in the potential delamination of the product. Microcracking may also occur along solvent polished edges.

DRILLING

While standard drills and bits can be used when fabricating Hygard laminates, TUFFAK WG and MG products, those specifically designed for use with plastics perform with greater precision. Drills for plastics generally have wide, polished flutes to reduce friction, as well as spiral or helix designs to remove chips quickly.

» Use drill-point angles larger than 90 degrees

Drill bit design

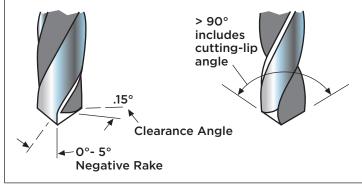

General guidelines for drilling Hygard laminates, TUFFAK WG and MG:

- » Use carbide-tipped drills, they resist gumming and maintain edge sharpness longer than standard drills
- » Avoid cutting fluids; most are not compatible with polycarbonate
- » Cool work if necessary by forced-air stream
- » Avoid drilling into the edge of laminated sheets due to possible loss of interlayer adhesion

Use sharp drills for cleanest cut and frequently clear the hole of chips. Avoid overheating as stress buildup in the material may have an adverse effect on mechanical properties compromising product performance and reliability. If drilling holes, place them no closer than 2 times the diameter of the hole from the edge. Avoid holes in parts intended for ballistic rated applications.

Hole diameter	Drill speed (rpm
1/8″	1750
1/4″	1050 - 1500
1/2″	350 - 500

RESOURCE ON DRILLING AND ROUTER CUTTING:

https://www.onsrud.com/articles/The-Most-Common-Problems-In-Plastic-Routing.asp

FABRICATION – LAMINATE & HEAVY GAUGE SHEET

MILLING/ROUTING

To cut clean edges on Hygard laminates and TUFFAK WG and MG, use straight, 2-3 fluted carbide tipped or high-speed bits, and router speeds of 20,000-25,000 rpm. Feed sheet against the router bit rotation at a controlled rate to avoid overheating, minimize vibration and produce a smooth part edge. Use a fence for sizing when making straight cuts.

Summary on cutting:

- » Use only sharp cutters
- » Drill holes slightly oversized
- » Drill holes off sheet edge by distance at least 2 times diameter of hole
- » Countersink is not recommended, counter-bore is acceptable in heavy gauge sheet
- » Countersink and counter-bore is not recommended for Hygard laminates
- » As cooling medium use forced air, not cutting fluids
- » Do not allow material to overheat
- » Cut edges must be smooth; sand coarse surfaces and chatter marks
- » Leave masking on product during fabrication, remove soon after installation
- » Use cleaners compatible with polycarbonate. If unsure, consult with manufacturer before use


FRAME DESIGN

Select a metal frame that matches the same level of security-rated protection as the specified Hygard laminate.


Corner design

Mitered corners require added bracing. Attach metal angle bracing at the corners to strengthen the overall frame.

For optimal frame design, use a continuous metal extrusion.

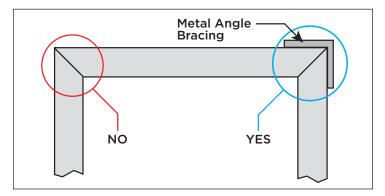

Product performance relies heavily on the method of attachment, the assembly and the potential for thermal expansion.

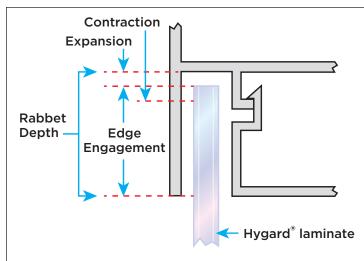

Glazing recommendations

- » Frame system must meet or exceed Hygard laminate ballistic rating
- » Hygard laminate dimension must allow for at least 1 inch edge engagement
- » Use only gaskets, tapes and sealants compatible with polycarbonate
- » Use setting block strips of polycarbonate, EPDM, neoprene or Santoprene® synthetic rubber
- » Remove protective masking soon after completing the installation, as prolonged exposure to the outdoors will degrade the film making it difficult or impossible to remove

Santoprene® is a registered trademark of Exxon Mobil Corporation

Thermoforming is a cost-effective and practical processing method for producing three-dimensional shapes from a flat thermoplastic sheet using heat and pressure. Thermoformed parts can be found across transportation, signage, architectural, specialty and industrial markets.

Known for its low tooling cost and moderate equipment investment, thermoforming is most economical where production volumes are 10,000 parts per year or less. It allows for great design flexibility, and serves as a practical means for prototyping and pre-production trialing of injection molded applications.

PRODUCT GUIDE: FORMABILITY

TUFFAK product	Vacuum forming	Drape forming	Line bending
CA	*	*	*
CA-UV	*	*	*
GP	*	*	*
DX-NR	*	*	*
FC	-	*	-
FD	*	*	*
FI	*	*	*
IR	*	*	*
LF	*	*	*
LD	*	*	*
LS	*	*	*
Lumen XT	*	*	*
ОР	*	*	*
NR	*	*	*
SL	*	*	*
SK	*	*	*
SK1	*	*	*
UC	*	*	*
WC	*	*	*

Pre-drying TUFFAK sheet

Prior to thermoforming, TUFFAK sheet must be pre-dried to prevent its physical properties from being compromised. Without pre-drying, the high processing temperatures may vaporize the small amount of moisture absorbed in the polycarbonate, causing air bubbles or voids in the thermoformed part.

Pre-dry TUFFAK at 250°F in an air circulating oven equipped with a vent to properly discharge any moisture removed from the sheet. Drying at lower temperatures requires a longer time to thoroughly dry the sheet.


Remove the protective masking from the sheet prior to pre-drying, and hang or rack in the oven with a 1-inch separation to allow for adequate air exposure. Note; sheets stacked without air spacing will not dry. While properly dried TUFFAK sheets will remain dry for approximately eight hours (or less in humid climates and conditions), Plaskolite recommends that sheets be processed as soon as possible upon removal from the oven.

Registration or distortion thermoforming

Registration forming, also referred to as distortion thermoforming, is the process of taking a distorted printed plastic sheet and vacuum forming the image or picture over the thermoformed mold. This allows the initial distorted image to appear in corresponding areas of mold resulting in a non-distorted, three-dimensional image.

Drying times/hours

Gauge	250°F	180°F
0.093″	4	8
0.118"	4	14
0.177″	12	30
0.236"	24	50

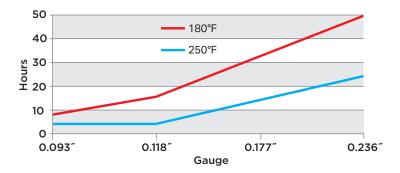

Forming equipment

When setting up the thermoformer, ensure there is adequate clearance between the clamping frame and mold to allow for deep sheet sag. Optimize the platen speed and clamp frame to maximize the processing rate.

Recommended heater elements include ceramic, quartz and halogen. Calrods and nichrome elements can also be used, but typically do not perform as well for heating control. The most efficient thermoforming machines have both top and bottom heater banks for heating polycarbonate sheet. One-sided heating limits forming method options, and tends to overheat the sheet surface and lengthen cycle times. Zone heating allows different banks of heating coils to be controlled separately to produce even heating. Unbalanced heating can lead to a non-uniform temperature profile in the sheet and is evident by uneven sag of the sheet.

The thermoformer's reserve vacuum tank must be of sufficient size, with a pump capable of generating and maintaining a vacuum of 20-inches Hg pressure throughout the thermoforming cycle.

Forming techniques

Vacuum forming


Selection of a female tool versus a male tool depends on the application and is most often determined by the part's appearance or the importance of its fit or assembly. Female tooling is used where the 'outside' part geometry is more important than the surface finish. Male tools are for applications needing 'inside' geometry detail and a blemish-free part surface. Make note that any blemish on the tool (male or female) will result in an imperfection on the part.

Female Tool Male Tool Heating and sag of sheet Dropping sagged sheet on mold Vacuum applied **Finished** part

Pressure forming


Pressure forming uses compressed air (up to 100 psi) to force the sheet into the mold. It allows for greater part definition and dimensional control. It also achieves more mold surface detail than other methods for applications that require texturing or

lettering, etc.

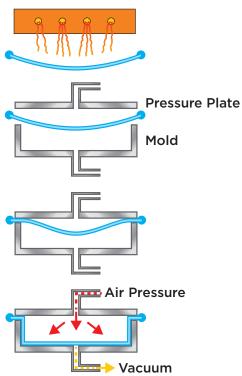


Plug-assisted forming

Plug-assisted forming prevents excessive thinning of material in deep-mold cavities. A plug-assisted formed part has more uniform thickness in the walls than a part produced by typical, single-stage vacuum forming.

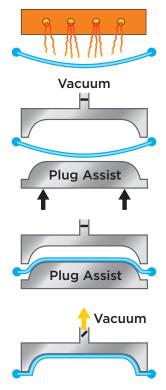

Twin sheet forming

Twin sheet forming uses two sheets of plastic and two female molds in a single clamp frame setup. A blow pin is inserted between the sheets, and pumps hot air between them to prevent sticking as they soften and sag. This process requires a two-side heater bank. Twin sheet forming is ideally suited to hollow parts with sealed edges, and parts made of two different materials.

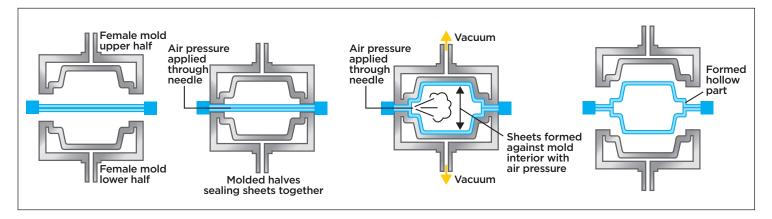

Vacuum forming heating cycle

The target sheet temperature for vacuum forming TUFFAK is between 340°F to 415°F, depending on gauge. The temperature profile of the sheet will define the resulting sag in the sheet. Maintaining the sag depth and shape provides a visual indicator for forming consistency.

TECH TIP:

Heating from top and bottom shortens cycle time. Check for inoperatve heating zones within the forming unit prior to thermoforming sheets.

Forming guidelines			
Sheet temperature			
Typical	340°F - 415°F		
Optimum	350°F - 375°F		
Metal mold temperature	210°F - 250°F		

Characteristics of thermoforming polycarbonate

While TUFFAK sheet forming characteristics are different than other thermoplastic sheet materials, it outperforms them in production efficiency due to its short heating times, and rapid forming and cooling cycles.


Important reminders for thermoforming TUFFAK

- » Thermoforming temperature is relatively narrow: 340°F 415°F
- » Polycarbonate has a glass transition temperature of 298°F. Above 311°F it begins to soften rapidly.
- » If TUFFAK is not pre-dried, vaporizing moisture absorbed in the sheet can cause air bubbles
- » Polycarbonate cools rapidly. Platen movement and clamp frame travel must operate at appropriate rates without delay.

Typical heating times for TUFFAK polycarbonate sheet

0.360 0.320 0.280 Thickness (in.) 0.240 0.200 0.160 0.120 0.080 0.040 0 0 40 80 120 160 200 240 280 Heating Time (sec.)

Sheet sag at forming temperature

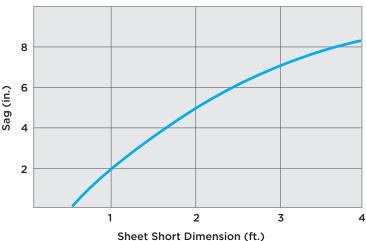

29

32 Heating Time (sec.) Sheet Short Dimension (ft.)

Molds

Extremely durable and higher quality than their lower cost counterparts, aluminum molds are ideal for high volume and recurring production programs. However, for limited or small run volumes, less expensive mold materials like epoxy, fiberglass and wood may be more economical choices.

Note: Aluminum tools require internal heating to maintain a surface temperature of 210°F - 250°F.

Mold design

Mold shrinkage: Molds require oversizing in their design to compensate for part shrinkage due to cooling. TUFFAK sheet shrinkage is 0.005 - 0.007" per inch.





Draft Angles: Draft angles greater than 5° allow for easier removal of the part from the mold.

Radii and Fillets: Use generous radii wherever possible. The radius minimum should be equal to or greater than the starting material thickness, as this minimizes the thinning of the sheet, improves part rigidity and avoids creating a stress riser point. On female tooling, use corner fillets.

Vacuum Holes: To form sheet rapidly and allow for fast air evacuation, make several holes with small diameters. A 0.030-inch diameter hole is usually small enough unless the part's wall thickness is less than 0.030". In female molds, use air evacuation holes at all deep draw areas, especially around the mold perimeter where the sheet draws last.

Tips on mold design

- » In both male and female tooling, keep the diameter of the drilled holes no larger than the thinnest wall section to avoid marking the sheet. Additionally, in female tooling, design long thin slots for air evacuation.
- » Vapor hone or sand blast metal tools for a uniform surface finish.
- » A highly-polished mold surface is not recommended as it causes sticking and air pockets.
- » The radius minimum should be equal to the sheet's original thickness to relieve stress riser points.
- » Preheat mold. Cold molds can cause surface defects, warping and elevate internal stress in parts.
- » If mold temperature becomes too high during thermoforming, TUFFAK sheet can stick to the mold. Control mold temperature between 210°F and 250°F.

Free forming

Free blown billow forming (as shown below) is a process used for making dome shapes. Apart from the mold, the procedures and equipment are the same as vacuum forming. Billow forming can be done with compressed air or vacuum.


Procedure:

- 1. Pre-dry TUFFAK sheet following recommendations
- 2. Preheat clamps and tooling to 240-250°F
- 3. Place sheet in clamping frame of thermoformer
- 4. Heat sheet until uniform sag forms (340-375°F)
- 5. Remove heat source
- 6. Lower pressure box to seal air supply pressure
- 7. Apply high air pressure initially. As dome takes shape, reduce air pressure
- 8. When overall height is achieved, maintain positive air pressure until part cools
- 9. Be sure air source is properly filtered and uniformly dispersed for even formation of dome
- 10. Utilize electric eye designs or micro switches for height control and consistency
- 11. Remove and trim part

Blown dome forming

Heater Air box TUFFAK polycarbonate sheet Electric eye sensor Air pressure

Drawn dome forming

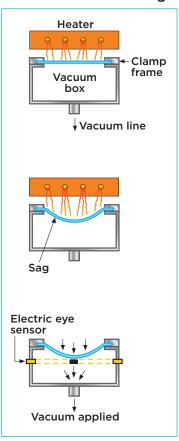


TECH TIP:

Drape forming

Drape forming requires a felt covered wood tool for making a single radius of curvature parts, or designs of slight contours. Face shields and recreational vehicle windscreens are examples of parts made by this method. The sheet is typically heated on an oven shelf or other means of supporting sheet.

Procedure:

- 1. Pre-drying TUFFAK sheet is not typically required in drape forming.
- High quality, reproducible forming requires consistent orientation in handling and cutting (top versus bottom), as well as extrusion direction. Do not flip or rotate sheets.
- 3. Heat oven at 320°F-325°F.
- 4. Locate the oven shelf at the midpoint of the oven for optimum heat balance. Place a felt covered piece of plywood or other flat rigid, heat-resistant sheet on the oven rack or on a portable oven dolly. Be sure to use a fabric cover to protect the sheet from scratches.
- 5. Bring TUFFAK sheet to forming temperature in the oven at 320-325°F. Depending on gauge, this may take several minutes. For example, 0.118″ gauge sheet takes approximately 3-5 minutes.
- Manually remove the heated sheet from the oven, and immediately position it over the felt covered mold.
- 7. Apply pressure at the edges of the sheet to help the sheet take the form of the mold or use matched molds (clamshell molds). Cooling takes about 30-60 seconds.
- 8. Always wear thermal gloves when handling hot sheet, holding the material by its edges.

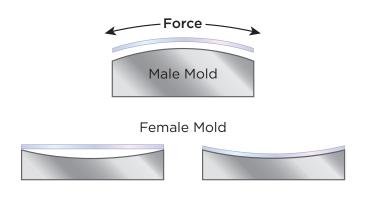

Typical representation of thermoformed part

Line bending or strip heating

Line bending, also referred to as strip heating, is a technique for producing linear bends. Generally, pre-drying is not required for line bending TUFFAK sheet gauges up to 0.177". For thicker sheets, back routing or V-grooving along the bend line is recommended.

Procedure:

- 1. Remove protective masking in bend area
- 2. Regulate heating element to 340°F 365°F
- 3. Place sheet over heating element at bend area
- 4. Allow heat to soften material. The amount of time depends on gauge
- 5. Remove sheet and make desired bend on a felt covered fixture
- 6. Bend immediately as polycarbonate cools quickly
- 7. Allow part to cool on the fixture until set up about 30 seconds

Note: Some bends may require a degree of over-bend to achieve desired angle.

TECH TIPS:

- » Line bending works best for lengths of 24" or shorter. Longer dimensions require preheating the entire piece to 200°F first to prevent warping.
- » For best results with gauges greater than 0.177", use two-side heating, or turn the part frequently when using a one-side heater. This helps with even heat penetration, preventing moisture bubbling.
- » Additionally, for gauges greater than 0.177", back route or V-groove with a 1/16-inch radius to heat cross section. Again, this will help avoid moisture bubbling, while still creating a sharp angle.

Nichrome resistance wire (or Calrod type heater)

Milled groove to accept Nichrome wire (approximately 1/16 - 1/8" below surface of TUFFAK sheet). Do not allow wire to contact sheet directly.

TROUBLESHOOTING GUIDE

TROUBLESHOOTING GUIDE

Society of Plastics Engineers

Description of Problem	Possible Causes	Possible Corrective Action
Bubbles in formed parts	Excessive moisture	 Pre-dry sheet as recommended Preheat sheet Heat sheet on both sides Protect sheet from moisture until ready to use
	Heating sheet too rapidly	 Lower heater temperature Increase distance between heater(s) and sheet Blow air across the sheet's surface
	Uneven sheet heating	 Check heater output and/or power consumption Use pattern heating
		 Screen by attaching baffles, masks, or screening
Crazed or brittle parts	• Mold too cold	Increase mold temperature
	Incompatible mold lubricant	Change mold lubricant
Warped parts	• Mold too cold	• Preheat mold
	Clamp frames too cold	Preheat clamp frames
	• Removing part too soon	Increase cooling cycle time
	Overheated part	Use fans to help cool partDecrease mold temperature
	Uneven part cooling	Add more coolant channels or tubing to mold
		Check for plugged water flow
	Poor material distribution	 For deep drawing, use pre-stretching or plug assist
		Check for uneven sheet heating
	Poor mold design	Add vacuum holesAdd moat to mold at trim lineCheck for plugged vacuum holes
	Poor part design	Break up large flat surfaces with ribs where practical
		• Re-design with tapers or fillets
Texture washout and gloss increase	Forming temperature too high	Reduce heater temperatureDecrease heater cycle time
	Improper heating technique	Heat sheets from smooth side; keep texture side cool
		Pre-coat texture with strippable mask

Description of Problem	Possible Causes	Possible Corrective Action
Non-uniform drape	Uneven sheet heating	 Check heater output and adjust Use selective screening or shading to control heating Check for cold air drafts in heating station
Incomplete forming of part, poor detail	• Sheet too cold	Increase heating timeIncrease heater temperatureIncrease watt densityCheck for heating uniformity
	Cold clamping frame	Preheat clamping frame
	• Insufficient vacuum	 Check for clogged vacuum holes Check for proper location of vacuum holes Increase number of vacuum holes Increase size of vacuum holes Check vacuum pump Check vacuum system for leaks
	Vacuum not drawn fast enough	Where possible, use vacuum slots instead of holes
		 Increase size of vacuum holes Increase vacuum surge and/or pump capacity Increase size of vacuum line and valves
		avoid bends and tee-elbow connection
	Part draw ratio too large	Check for vacuum system for leaks
	Insufficient pressure	 Increase vacuum capacity Add plug, pressure, or frame assist Increase air pressure on side of part opposite mold surface, if mold can withstand this force
		Use frame assist
		 Use plug, silicone, slab rubber, or other pressure assist
		Increase pump capacity
	Poor mold design	Add vacuum holesCheck for good seal between clamp frame and vacuum box
Scorched sheet	Top or bottom surface too hot	Decrease heating cycle time Decrease heater temperature

Description of Problem	Possible Causes	Possible Corrective Action
Poor surface finish	Mold surface too rough	Draw-polish mold or use mold material better suited to mold service requirements
	Mold mark-off	Use powdered mold lubricant sparingly
	Draft angle too shallow	• Increase draft angle
	Air entrapment over smooth mold surface	 Grit-blast mold surface Add vacuum holes in affected area
	Insufficient vacuum	Add vacuum holes
		 Check for proper location of vacuum holes
		 Check vacuum system for leaks
		Check for plugged vacuum holes
	• Mold too hot	Decrease mold temperature
	• Mold too cold	Increase mold temperature
	• Dirty sheet	Clean sheet with deionizing airgun
	Dirty mold	Clean mold with deionizing airgun
	Dust in atmosphere	Clean thermoforming area
		 Isolate thermoforming area and filter air
	Scratched sheet	• Polish sheet
Loss of color	Overdrawn sheet (Part too thin)	Increase sheet gauge
		• Increase sheet temperature
		• Use pre-draw
		• Use plug assist for deep-draw parts


Description of Problem	Possible Causes	Possible Corrective Action
Chill marks or mark-off	Mold temperature too low; stretching stops when sheet meets cold mold or plug	Increase mold temperature
	Insufficient draft angle and radii	• Increase draft angles and mold radii
	Plug temperature too low	Increase plug temperature
		• Use wood plug assist
		Cover plug with cotton flannel or felt
	Sheet too hot	Reduce heater temperature
		Heat more slowly
		Use fans to reduce the surface of hot sheet slightly before forming
Nipples on mold side of formed part	Vacuum holes too large	Decrease hole size
	Dust on mold or sheet	Clean mold and sheet with deionizing air gun
	Mold too cold	Increase mold temperature
	Mold surface too smooth	Draw-sand mold surface with medium-grit paper
	Vacuum rate too high	Place small orifice over main vacuum hole
	Sheet too hot	Decrease heating cycle time
		Decrease heater temperature
Webbing, bridging, or wrinkling	Sheet too hot in center	 Screen center of sheet, allowing edges to heat first; use taller vacuum box to provide more pull in area
		Decrease heating cycle time
		Decrease heater temperature
	Sheet too cold in webbing area	Use pattern heating
		Increase billow height
	• Mold too cold	Increase mold temperature
	Vacuum rate too fast	Slow down vacuum rate
		Use smaller vacuum holes
		Restrict main vacuum line
	Insufficient vacuum	Check vacuum system for leaks
		 Increase number of vacuum holes or slots
		Check for clogged vacuum holes
		 Check for proper location of vacuum holes
		• Increase size of vacuum holes

Description of Problem	Possible Causes	Possible Corrective Action
Webbing, bridging, or wrinkling - Cont.	Draw ratio too great in area of mold, or poor mold design or layout	 Redesign mold Use plug or ring mechanical assist Use female mold instead of male mold Add take-up blocks to pull out wrinkles Increase draft and radii where possible Increase space between multiple articles Speed up assist and/or mold travel
	Blanks too large for mold	Redesign grid, plug, or ring assists Leave minimum of material around mold
	Uneven cooling due to slow drape speed	Drape at higher speed
Insufficient draw-down	Improper sheet heating	Increase heating time and temperature
	Insufficient vacuum	Check vacuum system for leaks
Poor wall thickness distribution and excessive thinning in some areas	• Uneven heating	Check uniformity of heater outputUse screening or shading to control heating
		 Check for drafts or air current in heating station
	Improper forming technique	Use billow or snap-back forming method
		 Reduce time delay between pre-stretch and mold drawing
		Control height
	Excessive sag	Reduce sheet temperature
		Use pattern heating
	Cold mold	Increase mold temperatureCheck for uniform mold heatingCheck temperature control system for scale or plugging
	Sheet pulls from rails	 Air-cool rails prior to heating Move rails in to grasp more sheet Use drag bands at rail edge
	Sheet slips from frame	Adjust frame alignment
	Sheet slips from frame	Increase frame clamp pressure
		If retainer springs are used, change to high-temper springs
		• Pre-heat frames prior to inserting sheet
		 Check heaters around clamp area for proper operation
		 Screen or shade center of sheet to allow more heat at perimeter

Description of Problem	Possible Causes	Possible Corrective Action
Shiny streaks on part	Sheet too hot in spots	Lower heater temperature in overheated area
		 Use screening or shading to control heating
		Decrease heating cycle time
		 Increase distance between heater and sheet
Excessive shrinkage or distortion of		
part after removing from mold	Part not adequately cooled	Increase cooling cycle time
		Use cooling fixtures
		 Increase capacity of cooling system
		 Use fan or vapor spray mist to cool part faster on mold
	• Mold too hot	Reduce mold temperature
		Increase mold coolant flow rate
Corners too thin in deep draw	Uncontrolled material distribution	Consider other techniques such as billow-up, plug assist, etc.
	Sheet too thin	Use heavier-gauge sheet
	Sheet temperature too high at corners	 Use screening or shading to control heating pattern
	Mold temperature not uniform	Adjust temperature control system for uniformity
		Check operation of mold heating system
	Drape speed too fast	Reduce drape speed

Description of Problem	Possible Causes	Possible Corrective Action
Difficult part removal	Part or female mold temperature too hot	Increase cooling cycle timeDecrease mold temperature
	Male mold too cold, part sticking	Increase mold temperature
	Male mold too hot, causing part distortion	Decrease mold temperature
	Insufficient mold draft	Increase taper/draft
		Use female mold
		 Remove part from mold as soon as possible
	Ejection pressure too low	Add air holes
		 Increase injection pressure
		Use powdered mold release
	Mold undercuts	Use stripping frame
		• Increase air-eject air pressure
		 Remove part from mold as soon as possible
	• Wood Mold	 Spray mold surface with a compatible mold release agent
	Rough mold surface	Polish corners or entire mold surface
		• Use mold-release agant
		Use PTFE spray
Loss of vacuum seal	• Cold clamp frames	Preheat clamp frames
	 Improper spacing between clamp frames and vacuum box 	 Adjust space between clamps and vacuum box to between 0.50 and 0.750 in. (13 and 19 mm)
Sheet sticking to plug	Plug temperature too hot	Decrease plug temperature
		 Use mold release agent on plug
		 Apply a PTFE coating
		 Cover plug with felt cloth or cotton flannel
	• Wood plug assist	 Cover plug with felt cloth or cotton flannel
		 Use mold release agent on plug
		 Apply a permanent PTFE coating to surface of plug
Tearing of sheet during forming	• Mold design	Increase corner radius
	• Sheet too hot	Decrease heating cycle time
		Decrease heater temperature
		Check sheet for uniform heating
		Preheat sheet
	Sheet too cold (usually thinner gauges)	Increase heating cycle time
		Increase heater temperature
		Check sheet for uniform heating
		Preheat sheet

Description of Problem	Possible Causes	Possible Corrective Action
Tearing of sheet during forming - Cont.	Poor material distribution	Check sheet for variations in gaugeCheck sheet for uneven heating
	Pre-stretch too large	Reduce billow blowing timeReduce billow temperature
Cracking of part during service	Stress concentration	• Increase fillets
		 Increase sheet temperature Be sure part is completely formed before removing from mold
		Use proper forming temperature and cooling rate for deep-draw parts
		Increase mold temperature
	Poor part or mold design	• Re-evaluate design
	Sheet gauge too thin for draw	Increase sheet gauge
	Uneven sheet temperature	Use screening or shading to control heating pattern
Poor embossing detail	Embossing depth too shallow	Increase depth of embossing pattern
	Drawing not uniform	Use screening or shading to control heating pattern
		 Use plug assist and/or billow to pre-stretch sheet
Excessive sheet sag	Sheet too hot	Decrease heating cycle time
		Decrease heater temperature
	• Sheet area too large	 Use screening or shading to control heating, particularly in the center of the sheet.
Varying sag levels among sheets	Sheet-to-sheet temperature variation	Check for cold air drafts in heating station
Non-uniform billow	Uncontrolled sheet heating	Check heaters for proper operation
		 Use screening or shading to control heating
		 Check for cold air drafts in heating station
	Non-uniform die pressure within billow	Check air pressure system for leaks
		 Check seal between sheet and billow box
		Redirect incoming air to billow box

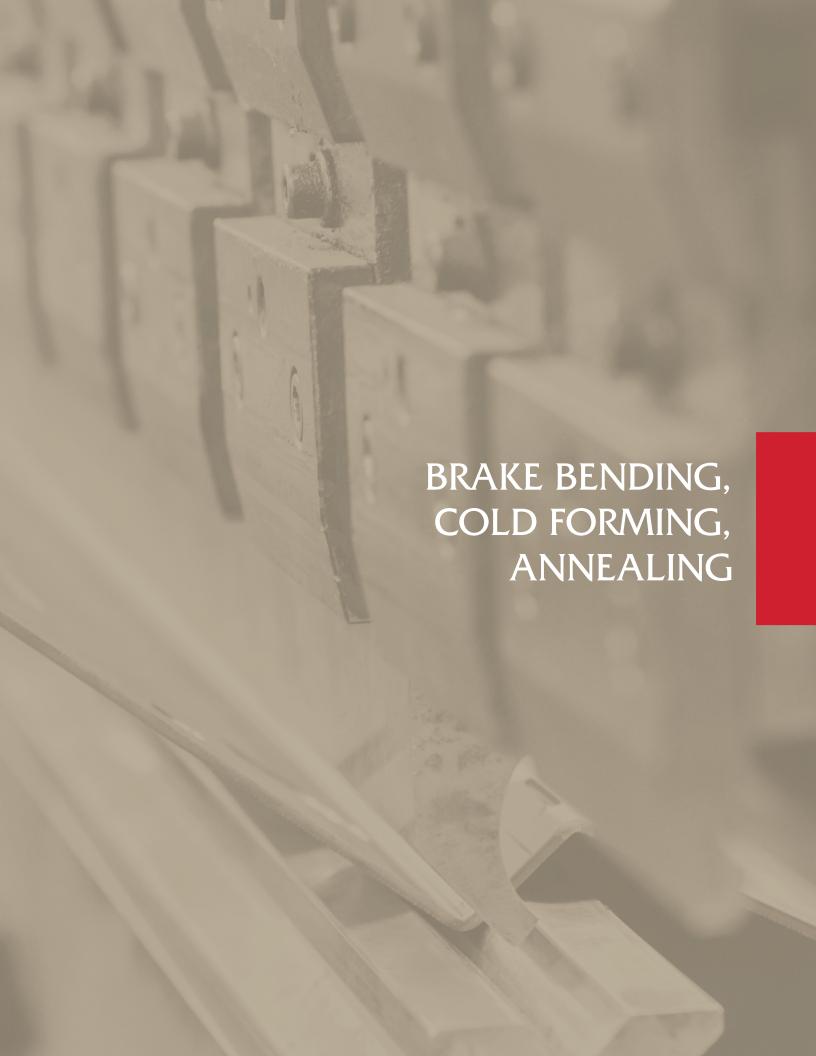

BRAKE BENDING

Brake bending


TUFFAK polycarbonate sheet up to 0.177" thick can be brake bent up to 90° angles. For gauges thicker than 0.177", strip heat bending is recommended to prevent potential cracks or breakage. Strip heat bending should also be used for all flame-resistant sheet grades.

TECH TIPS:

- » Perform the bending operation quickly
- » To attain the desired angle, some degree of over-bend is required
- » Do not brake bend flame retardant grades due to possibility of cracking
- » For best results with gauges greater than 0.177", use two-side heating, or turn the part frequently when using a one-side heater. This helps with even heat penetration, preventing moisture bubbling.

DO NOT HEAT SURFACE > 200°F

» Additionally, for gauges greater than 0.177", back route or V-groove with a 1/16-inch radius to heat cross section. Again, this will help avoid moisture bubbling, while still creating a sharp angle.





ANNEALING

Batch oven method

Annealing is a way of relieving internal stresses in thermoplastic parts caused by thermoforming or fabrication. The polycarbonate sheet is thermal conditioned at an elevated temperature over a specified time period and then cooled slowly. Through annealing, potential dimensional instability of a part, such as warp, is also reduced.

While annealing is effective for reducing stresses, it is time-consuming and may not be economical or practical for all situations.

Also, extended heat histories can affect the physical properties of plastics. If you have questions or concerns regarding annealing, contact your Plaskolite representative, or the Technical Service Group.

Annealing procedure:

- 1. Prior to heating, support or fixture the part to the desired geometry using low thermal conductivity framing (e.g., wood)
- 2. Slowly heat oven, fixture and part at the same time to 250°F
- 3. Hold at 250°F for 15 minutes per 0.125" sheet thickness
- 4. Turn off heater, blower remains on, starting the cool-down cycle
- 5. Remove part from oven, remove the part from the fixture


COLD FORMING

Cold forming

TUFFAK sheet may be cold-formed, bent into place without heating, to a radius based on the sheet thickness. As a guideline, the minimum cold forming radius is equal to 100 times the thickness: ($R = T \times 100$).

Cold forming radius guide - inch

Sheet thickness	Minimum radius
0.118	12
0.177	18
0.236	24
0.370	37



TUFFAK cold forming product guide

Cold formable

CA	Lumen XT
CA-UV	NR
GP	OP
DX-NR	SL
FC	SK
FD	SK1
FI	SK1-CC
	SK1-HD
IR	UC
LF	UV
LD	WC
LS	

Not cold formable

15
AR
CA-AR
Hygard®
NR-C



BONDING APPLICATIONS

Solvent bonding

Solvent bonding joins one plastic to itself or another type of plastic that dissolves in the same solvent. Typically, this process involves treating the bonding area with the *minimum* amount of solvent needed to soften the surfaces and then clamping the parts together until they bond.

Methylene chloride or ethylene dichloride bonds TUFFAK sheet to itself. Methylene chloride's fast evaporation rate helps to prevent solvent vapor entrapment for simple assemblies. For complex assemblies that require more curing time, use ethylene dichloride. A 60/40 mixture of methylene chloride and ethylene dichloride will allow for longer a time to assemble parts than pure methylene chloride.

Expect brittleness and reduced impact strength at the bonded joints.

Note: Wear proper protective equipment when working with chemicals. Adequate ventilation is essential.

Review Safety Data Sheet from product manufacturer and control exposure according to OSHA guidelines.

Bonding procedure

- For optimum bonding, confirm the parts mate flush. This helps to ensure uniform pressure distribution across the entire bond area.
- 2. Clean joint surfaces with isopropyl alcohol.
- 3. Use fresh solvent.
- 4. For best results, avoid using excessive solvent it causes bubbling and "squeeze-out," which decreases bond strength.
- 5. Apply a thin bead of solvent using a needle applicator; the capillary action will pull the solvent into the joint interface.
- For large parts, it may be easier to use a shallow pan containing enough solvent to cover the edge of the bonding part.
- 7. Dip part into pan, wetting its edge.
- 8. Transfer onto mating part.
- 9. Apply pressure to the mating parts.
- 10. Hold fixture for a minimum of 60 seconds.
- 11. The bonded part is now safe to handle.

TECH TIPS:

- » A fully cured joint requires 24-48 hours drying time
- » Always cure parts in a well-ventilated area; never in an enclosed space. Trapped methylene chloride vapors chemically attack polycarbonate, reducing its physical properties.
- » A 5-10% solution of polycarbonate shavings dissolved in methylene chloride helps to produce a smooth, filled joint and improves strength. For critical applications requiring more durability consider an adhesive product.

Avoid whitening of bond

- » Use fresh solvent whenever possible. Once a container is opened, the solvent can absorb moisture from the air over time. Wet solvent can cause a cloudy bond.
- » Fabricate in a climate controlled area with low relative humidity.
- » Add 10% glacial acetic acid to a container of previously opened solvent to help reduce whitening.
- » Add 5-10% polycarbonate shavings to the solvent to help slow cure time and reduce whitening.

Adhesive bonding


Adhesive bonding systems are among the most robust for joining plastic parts to parts made of the same plastic, different plastics or non-plastic materials. Generally, adhesives produce more consistent and predictable results in joints requiring strength and durability than other joining methods.

Consider the following when selecting an adhesive bonding material:

- » Chemical compatibility with TUFFAK sheet
- » Flexibility or rigidity requirements
- » Load bearing force
- » Environmental condition and temperature requirements
- » Aesthetics

General characterizations of different adhesive systems:

- » In general, urethane and epoxy adhesives impart excellent bond strength.
- » UV-cured adhesives, attractive for curing in seconds, provide high bond strength.
- » Silicone adhesives have flexible, strong bonds.
- » Foamed adhesive tapes are known for strength and durable performance.
- » Hot melts provide quick set times where high bond strength is not required.
- » Use care in selecting adhesives, as some can be aggressive toward TUFFAK sheet.

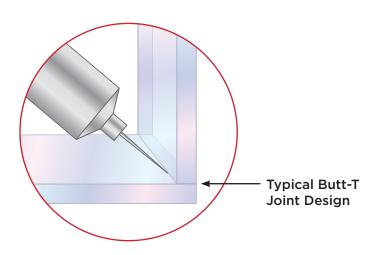

BONDING APPLICATIONS

Adhesion selection guide

Product	Description	Bond type
Methylene chloride	Solvent	High tensile strength, low impact resistance
Urethane	Polymer base	Structural bond, fatigue resistant, limited flexibilty and UV resistance
Ероху	Polymer; 1 and 2 component	Structural bond, heat and chemical resistant, limited flexibility, absorbs moisture
Silicone	Silicone	Flexible, strong bond, heat, chemical, environmentally resistant
Adhesive tape	Acrylic adhesive foam-backed, films	Flexible, structural bond, for non-aesthetic uses
Hot melts	Polymer	Fast set, versatile, range of bond strengths

Selected product web links

Solvent, hardware store, chemical suppliers

SOLVENT CEMENT:

http://es.ipscorp.com/pdf/assembly/AssemblyAdhesive_Product_Selection%20Guide_Jan08.pdf


URETHANE: https://www.lord.com/products-and-solutions/adhesives/structural/urethane-adhesives

EPOXY: http://www.masterbond.com/lp/performance-properties-and-common-applications

SILICONE: https://siliconeforbuilding.com/product/scs2000-silpruf-sealant

ADHESIVE TAPE: http://solutions.3m.com/wps/portal/3M/en_US/Adhesives/Tapes/Brands/3M-VHB-Tape/

HOT MELT: https://www.bostik.com/us/Bostik-products/thermogrip-h2315-02-hot-melt-pressure-sensitive-adhesive

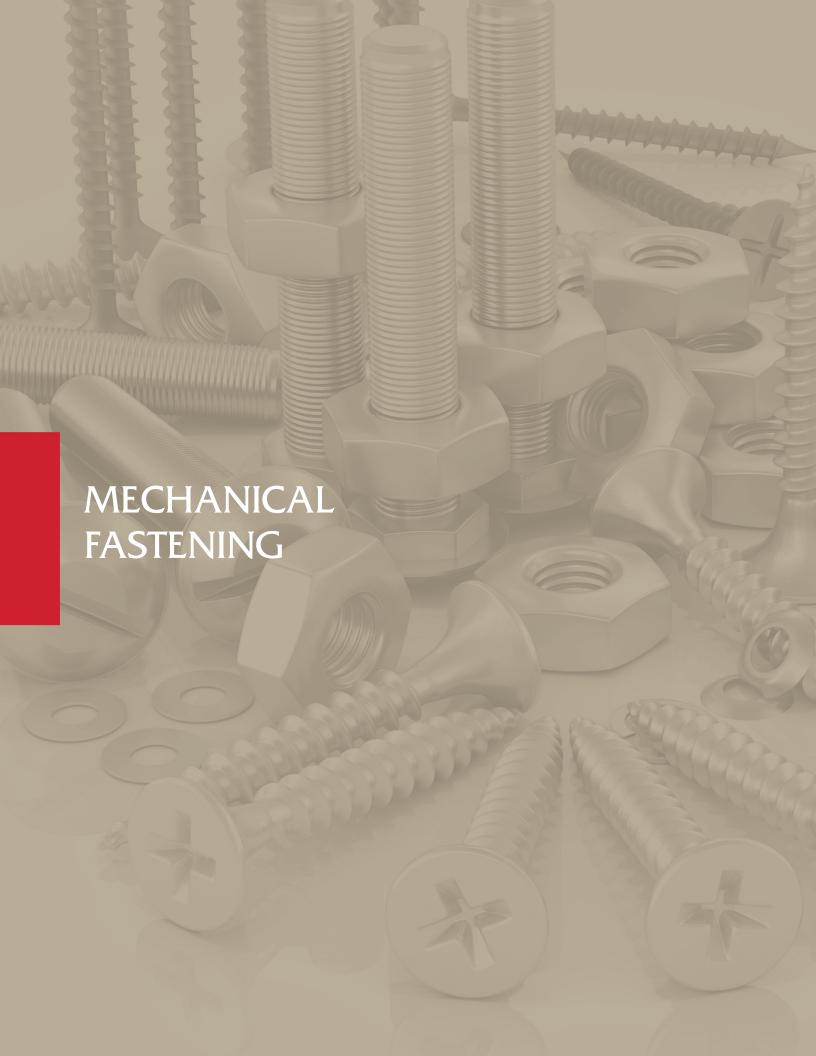


MECHANICAL FASTENING

Mechanical fasteners


Due to their low cost and reliability, screws, bolts and rivets are common joining methods. Common practices and selection criteria are discussed within this section.


Common head styles of screws and bolts

Pay special attention to the fastener's head. Use bolt and screw heads that have a flat underside, called "pan" or "round" head. This bolt design imparts lower compressive stresses on the material. Conical heads, called flat or oval heads, produce undesirable tensile and hoop stresses and should be avoided.

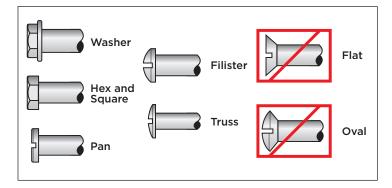


Fastening with bolts, nuts, and washers

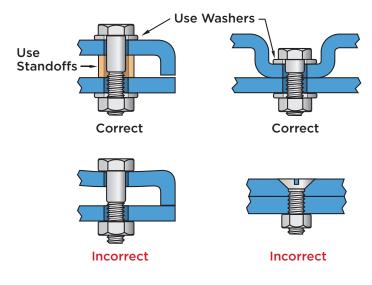

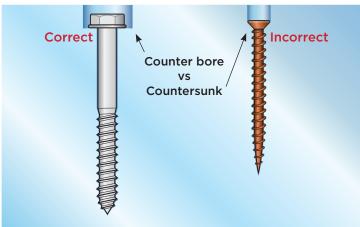

Fastening with self-tapping screws

Use thread-cutting screws, which cut away material from a pre-drilled hole to form a mating thread and result in better long-term performance. Note the radial and hoop stresses imparted to the part by thread-cutting screws are lower after installation vs. thread-forming screws. Typically, thread-cutting screws are classified as ANSI BT (Type 25), ANSI T (Type 23). Thread-cutting screws may not be appropriate in all applications and environments. Cracks around the screw hole may form under conditions where the polycarbonate expands and contracts due to temperature variations.

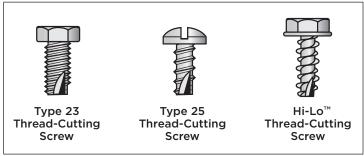


Hi-Lo is a trademark of ITW Shakeproof

Fastening with rivets

Rivets offer a low-cost and simple hardware solution for static parts. Aluminum rivets are preferred over harder materials. Select rivets with large flat heads and three times the shank diameter. Use of washers on the flared end are helpful in distributing loads, but be careful not to over-tighten as it can result in compressive stress and damage to the plastic.

Four standard rivet heads

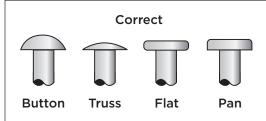



Use flat aluminum or hard plastic washers under nuts and fastener heads to evenly distribute the applied force. Their ability to resist over-compression helps to prevent localized stressing of the joining part. Ensure there is sufficient distance between the edge of the fastener's hole and the part's edge: at minimum, two-times the diameter, and twice the part's thickness. Note: Slotted holes require more edge clearance.

TECH TIP:

Avoid thread locker products. They are generally incompatible with TUFFAK polycarbonate sheet, causing cracking and crazing.

MECHANICAL FASTENING

Joining dissimilar materials


For assemblies constructed of a combination of TUFFAK sheet and metal (two dissimilar materials), it is important to design for thermal movement behavior. When heated, the plastic may buckle, due to its higher thermal expansion rate. Conversely, when cooled, the greater thermal shrinkage of plastic will cause strain-induced stress and may exceed the plastic's working limit. This could lead to part failure.


The figure to the right shows a plastic part fastened to a metal component. As the ambient temperature rises, the plastic will expand more than the metal because the plastic's coefficient of linear thermal expansion is four times higher.


For applications where wide temperature variations exist, use slotted screw holes in the plastic part. When joining plastic and metal parts, do not tighten fasteners to the point where joint friction and compressive loads prevent relative movement. If the fasteners are too tight it negates the effect of the slotted holes.


Factors to consider when joining plastic and metal parts:

- » The size of the parts to be joined
- » The magnitude of the temperature range
- » The relative thermal expansion coefficients of the materials used in the part

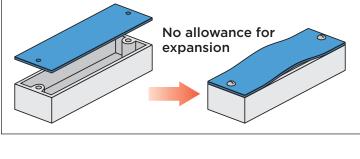

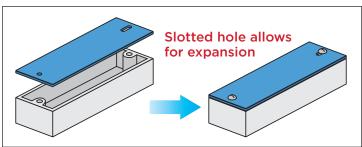

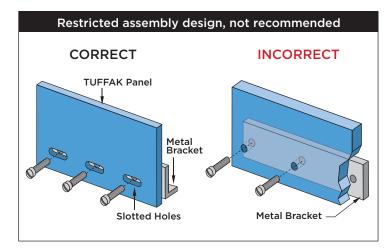

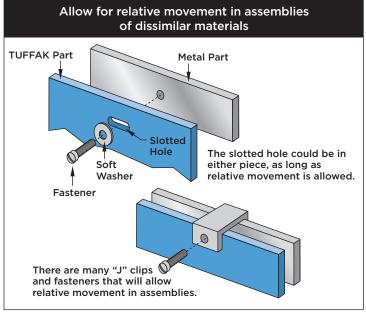

Coefficient of Linear Thermal Expansion (CLTE) values for materials

- Material	CILL (IO III/III/ I)
TUFFAK	3.8
Aluminum	1.3

Material

CTI E (105 in/in/0E)

Example 1: Calculate the change in length for a 96 inch part that is constructed at 70° F, but will see operating temperatures up to 120° F

 $\Delta L = (plastic CLTE - metal CLTE) * temperature change * length of part (0.000038 - 0.000013)*50*96 <math>\Delta L = 0.120$ inches Therefore, the design has to accommodate a growth of 0.12 inches.

Example 2: How much shrinkage will the same part see at -20° F

 $\Delta L =$ (plastic CLTE - metal CLTE) * temperature change * length of part (0.000038 - 0.000013)*90*96 $\Delta L =$ 0.216 inches

Therefore, the design has to accommodate a contraction of 0.216 inches.

MECHANICAL FASTENING

Ultrasonic welding

An ultrasonic welder has two primary parts: a horn and a nest. The horn typically presses down on the upper plastic part (of the two to be welded), clamping the two parts together. The nest supports the bottom plastic part to prevent it from moving. The horn is vibrated ultrasonically for a preset time. Friction from mechanical vibrations cause localized heating, resulting in plastic melting at the interface of the two parts. Pressure is then maintained after the vibrations are stopped until the melted plastic cools. Once the plastic has solidified, the clamping pressure is retracted and the two joined parts can be removed from the nest fixture.

The most important feature for a clean, ultrasonically welded joint is for one of the parts (to be welded) be designed with a triangular-shaped energy director. This minimizes the initial contact between parts. During welding, the ultrasonic energy is concentrated at the director tip, melting it and ultimately, joining the interface with molten resin.

Design energy directors with an apex angle from 60 to 90°. Generally, the base width of the energy director should not be more than 20 to 25% of the wall thickness supporting it.


Troubleshooting

- » Clean the mating surfaces with isopropyl alcohol to remove dust, fingerprints and grime prior to welding.
- » Check to see if the horn is making proper contact to the welding surface. Non-uniform horn contact produces non-uniform weld lines. Carbon paper is useful to confirm uniform contact.
- » Confirm sufficient energy is being supplied into the weld.
- » Increase pressure/clamping force on the parts being welded.
- » Increase the weld time.
- » Increase the amplitude to the horn. Consult equipment suppliers for recommended welding amplitude settings for polycarbonate.

For ultrasonic welding machines, the converter, booster, and a properly maintained weld horn are all key factors for delivering a welding amplitude that produces a repeatable and robust weld joint. Confirm that routine maintenance, daily checks and calibration programs are in place. Set and document minimum energy output for the unit that ensures a reproducible welding joint.

For optimum welding:

- » The horn, fixture and parts must be aligned properly
- » The stationary part should fit snugly in the nest or fixture
- » The height of the energy director should be approximately 0.020 inch
- » Join parts made of the same resin



For more information on ultrasonic joining techniques contact:

Dukane Corp. https://www.dukane.com/plastic-welding-products/ultrasonic-welders/

Forward Technology Industries, Inc. http://www.forwardtech.com/plastic-assembly

Herrmann Ultrasonics, Inc. http://www.herrmannultrasonics.com/en-us

Ultra Sonic Seal Co. http://www.ultrasonicseal.com/upa/upa tooling.html



FINISHING

The aesthetics or functionality of TUFFAK sheet can be enhanced through finishing or surface-decorating processes. Painting and screen-printing are typical decorating methods for enhancing a part's visual appeal.

Metallizing is an example of a process that adds functionality, such as electromagnetic shielding. Before decorating with any material, contact the manufacturer to confirm its suitability for use, and compatibility with polycarbonate.

PRODUCT GUIDE: DECORATION METHOD

TUFFAK Products	Digital Print	Screen Print	Paint	Vinyl	Hot Decorating
AR1 ⁴	*	*	*	*	*
CA	*	*	*	*	*
CA-AR	-	-	-	-	-
CA-UV					
GP	*	*	*	*	*
DX-NR ¹	*	*	*	-	*
FC ²	-	-	-	*	-
FD					
FI	*	*	*	*	*
IR					
LF	*	*	*	*	*
LD	*	*	*	*	*
LS					
Lumen XT ¹	*	*	*	-	*
NR¹	*	*	*	*	*
NR-C⁴	*	*	*	*	*
OP	*	*	*	*	*
SL	*	*	*	*	*
SK ³	*	-	*	-	-
SK1 ³	*	*	*	*	*
SK1-CC ³	*	*	*	*	*
SK1-HD³	*	*	*	*	*
UC	*	*	*	*	*
WC	*	*	*	*	*
UV	*	*	*	*	*

^{1.} Textured surface may interfere with decoration media, requires testing/verification

Screen printing

TUFFAK sheet can be printed with standard silk screening equipment. Note that screen mesh affects both the amount of ink that is deposited, as well as the resolution of the printed image.

As with all thermoplastics, TUFFAK sheet must be clean and free from surface contaminants prior to screening. Many screen printers use a 50:50 washing solution of water:isopropyl alcohol to clean the surface prior to printing. Be sure to use soft, nonabrasive cloths when cleaning to avoid scratching. Antistatic or ionized air guns also provide a good method for removing lint and dust, as well as static.

After printing, keep sheets separate on a drying rack until ink is dry. DO NOT pack sheets for shipment until inks are completely dry.

^{2.} Hard coat surface interferes with adhesion, requires testing/verification

 $^{{\}it 3. Painting prismatic surface will interfere with optical properties, requires testing/verification}\\$

^{4.} ARI and NR-C decorate the non-coated side of the sheet

Digital printing

UV cured inks are used in digital printing due to their quick cure times. Historically, a UV Mercury arc lamp has been used as the light source, but newer UV LED curing lamps are now preferred. These bulbs use less electricity, produce less heat, last much longer and do not require a warm-up period. It's important to note however, that the market has reported intermittent adhesion issues when printing on plastic substrates when curing with UV LED systems. Pretreating the plastic substrate with corona discharge, flame, UV light, solvent wipes, or adhesion promoters has proven successful in overcoming adhesion issues. For advice on UV LED cure ink applications, contact the Technical Service Group at 800.848.9124.

Painting

Many commercially available paints are available for TUFFAK sheet. Be sure to use only paints that have been tested by the supplier to be compatible with polycarbonate. As with screen printing, it is important the surface of the TUFFAK sheet be clean and free from surface residuals prior to painting. Many painters use a pre-rinse of 50:50 (water:isopropyl alcohol) to clean the surface. Be sure to dry thoroughly prior to painting. Use a soft, nonabrasive cloth or sponge to avoid scratching. Conventional spray, spray masked, roller coat and brush are common application methods.

Vinyl decorating

Application of colored vinyl film is a common decoration technique for TUFFAK sheet. Follow the vinyl film manufacturer's directions for product use. Flash drying TUFFAK sheet for at least one hour at 250°F prior to the film application has been shown useful in helping to prevent bubbling or blistering of the film over time. Using a commercial adhesion promoter, such as BONDAND I, is highly recommeded for better film adhesion to polycarbonate.

FINISHING

Hot stamping

TUFFAK sheet is easily decorated with a single-color image by hot stamping, a process widely used for its convenience, versatility and performance. A heated die fuses the impression made by the stamp to transfer color from the foil carrier to the substrate. The temperature, pressure and dwell time are adjusted based on the type of foil and substrate. Contact equipment and foil manufacturers about processing conditions and products for polycarbonate.

Heat transfer

Heat transfer decorating also uses a combination of heat, pressure and dwell time to apply preprinted graphics onto a part. Unlike hot stamping, the graphics are preprinted images that can be complex and multicolored. The major advantage of heat transfer decorating over printing or painting is that it is a dry process, making it more environmentally friendly. There are no strong odors associated with the process from volatile chemicals.

Printing and painting hard coated sheet products

Adhesion of ink and paint to the abrasion resistant coated surface is unreliable and not recommended on TUFFAK 15, TUFFAK AR, TUFFAK NR-C and TUFFAK FC. TUFFAK AR1 is a one-side hard coated sheet that can be printed on the side opposite of the coating, thus allowing for decoration in combination with the weatherable abrasion resistant coating.

Solvent polishing

In order to improve the look of saw-cut edges, begin by sanding the edges smooth.

For smoother, glossy edges, consider solvent polishing with methylene dichloride. o prevent humidity blush after drying, it may be necessary to add a small amount of glacial acetic acid. Keep in mind that polishing cannot be

expected to totally eliminate sand marks from the sheet edge. Solvent polishing is not recommended on laminated products and should only be used on monolithic polycarbonate sheet.

Note: Use extreme caution when working with solvents. Adequate ventilation is essential. Control exposure levels according to OSHA guidelines. Obtain Safety Data Sheets from the solvent manufacturer.

Sanding

The edges of TUFFAK sheet can be sanded using both wet and dry techniques. Of the two, wet sanding produces a smoother finish and is less likely to gum the sandpaper. In both instances, the part will require further finishing such as solvent polishing in order to yield a high gloss appearance.

TUFFAK sheet can also be buffed using a 2-wheel system. The first wheel uses a buffing compound to remove shallow scratches. The second buffing wheel is used for restoring the gloss.

Jointing-planing

A standard woodworking jointer-planer can be used to finish TUFFAK sheet edges. Blades must be carbide or high-speed steel. Avoid removing too much material in each pass, 1/64" or less normally yields the cleanest edge. Attempting to remove too much material in a single pass results in a rough edge or cracking of the sheet.

SOURCES

DIGITAL PRINTING

EFI: https://www.efi.com/support-and-downloads/

Radtech: www.radtech.org

ScreenWeb: www.screenweb.com/bg

 ${\sf SGIA:}\ \underline{www.sgia.org/printing-imaging/digital-printing-and-imaging}$

INK

 $ASPA: \underline{www.screenprinting-aspa.com/inks-for-screen-printing.html}\\$

NAPIM: www.napim.org/printing-inks

SignIndustry.com: www.signindustry.com/screen/

FOIL

FSEA: www.fsea.com

PAINT

ACA: http://paintandcoatingsbuyersguide.com

Akzo Nobel Coatings: <u>www.akzonobel.com</u>

Matthews Paints: www.ppg.com

Naz-Dar Corporation: www.nazdar.com

 $SignIndustry.com: \underline{www.signindustry.com/painted}\\$




TUFFAK polycarbonate sheet can be installed using wet (caulking type sealant) or dry (gasket type) glazing systems. TUFFAK sheet can be glazed as a single layer, as two layers for added thermal insulation or over-glazed for increased security to an existing window.

General recommendations

- » Match the metal framing (typically aluminum or steel) to the application requirements, such as the wind load or ballistics
- » Engage all sheet edges in the frame
- » Ensure the rabbet depth is sufficient for edge engagement, as well as thermal expansion or contraction
- » Use gaskets, sealants and tapes compatible with polycar bonate that have adequate elongation capability; contact the manufacturer of the product if unsure
- » Note that fastening with bolts through the glazing should only be used when unavoidable; the design needs to be reviewed to ensure thermal movement will not be restricted
- » Note that a sash intended for glass is unlikely to have enough rabbet depth, particularly for windows larger than 36 inches in one dimension
- » Use dry glazing with EPDM or neoprene gaskets for large windows (greater than 24 inches); sealants specifically designed with high elongation may also be a consideration
- » Peel back the masking only around the perimeter of the sheet prior to installation to protect from damage. Remove the remaining masking once the installation is complete. Do not leave the masking on the sheet for an extended period.
- » Use isopropyl alcohol or VM&P naphtha and a soft cloth for cleaning during installation
- » Refer to the TUFFAK sheet cleaning guideline for recommended practices and products

Thermal expansion allowance

The coefficient of linear thermal expansion of TUFFAK sheet is much greater than framing materials, such as aluminum and steel (see table for comparisons). The window design needs to accommodate for adequate expansion room to allow for free movement of the sheet to avoid unsightly sheet bowing and optical distortion. A general guideline is to allow 1/16 inch expansion/contraction per foot of sheet in both the length and width directions.

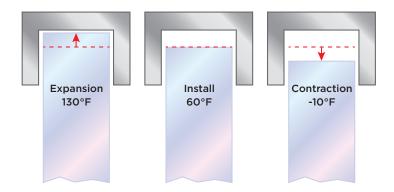

Comparative expansion rates

Material	Inch/Inch/°F)
TUFFAK	0.0000375
Glass	0.000050
Aluminum	0.000129
Steel	0.000063

Example calculation rabbet depth for a 48-inch sheet length and 70° temperature change


Calculation of Expansion/Contraction

0.0000375 x sheet dimension inches x temperature change 48" expansion: 0.0000375 x 48 x 70 degrees = 0.13"

48" contraction: 0.0000375 x 48 x 70 degrees = 0.13"

Rabbet depth:

Edge engagement + Expansion + Contraction 0.56 + 0.26 = 0.82"

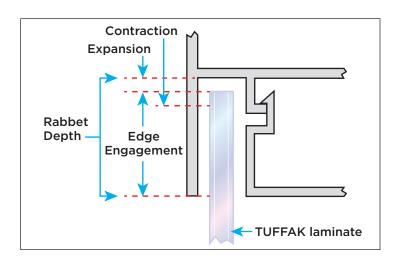

Sheet edge engagement, thermal expansion and rabbet depth table

Sheet size	24"	36″	48″	60″
Expansion + Contraction	1/8″	3/16"	1/4"	5/16″
+ Edge engagement	3/8″	1/2"	9/16"	3/4"
= Rabbet depth	1/2"	11/16"	13/16″	1-1/16"


Wind load


The wind load charts cover a range of sheet sizes and aspect ratios; consult the size closest to the design of interest. Within each chart, the thickness of the sheet is represented in the horizontal axis, and each color line represents a different wind load. The predicted deflection is for a given size window, sheet thickness, and wind load represented in the vertical axis. If a


deflection exceeds 2.5 inches, consider thicker sheet for the application.

Wind load deflection calculation assumptions:


- » All edges of the sheet are engaged in the frame
- » Dry glazing with 15% gasket compression clamping force allowing for sliding retention

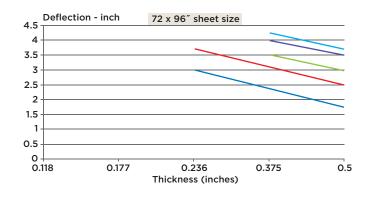


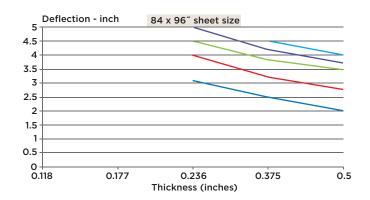


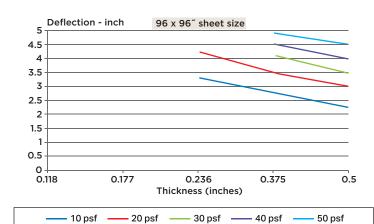


Design	pressure	Hurricane category	МРН
10 PSF	63 MPH	-	63
20	88	1	74-95
30	108	2	96-110
40	125	3	111-129
50	140	4	130-156

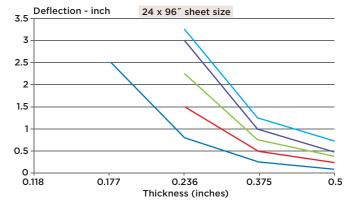

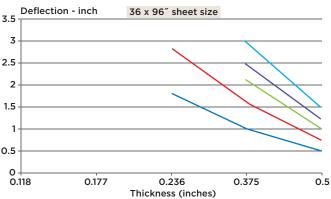

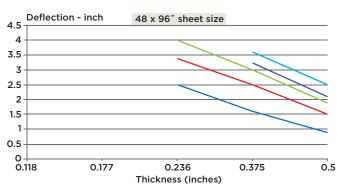

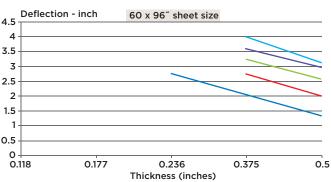


Basic glazing methods

The following requirements apply for both wet and dry glazing:

- » Measure the rabbet depth of the frame
- » Account for design wind load
- » Confirm edge engagement
- » Address potential expansion and contraction of the glazed dimension
- » Check for compatibility and adhesion of gasket, sealant or tape


Wet glazing

Wet-glazing is typically limited up to a 36x36 inch size window. Glazing shim tape is used to back the sealant cap bead as shown in the image.

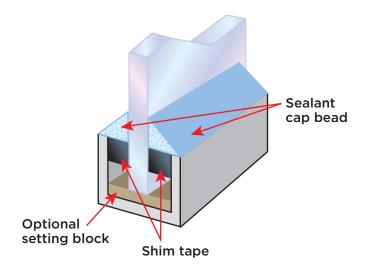

Dry glazing


For dry glazing, choose the extruded rubber gasket geometry that will prevent walk out due to sheet thermal movement and deflection. EPDM and neoprene are common gasket products for the interior glazing side of this application. Setting blocks help to allow for drainage via weep holes and also protect the sheet edge from contact with other liquids that might pool in the sill.

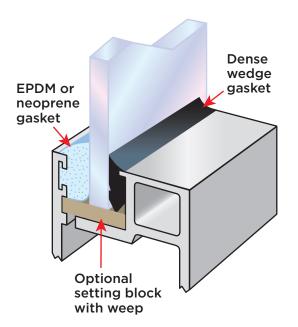

Wet/Dry glazing

Wet/dry glazing combination uses an extruded rubber and a sealant product. A soft open cell gasket type that breathes allows curing of the sealant cap bead.

Basic glazing is shown in the illustration. Contact your gasket manufacturer for specific instructions for use, as well as preferred tape and sealant products.

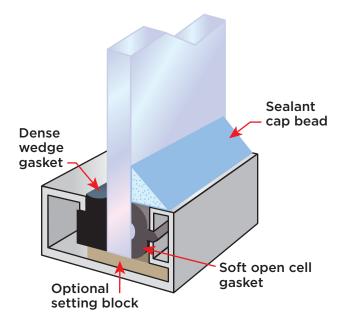


Over-glazing

Over-glazing offers performance enhancements such as energy efficiency and soundproofing. It also offers a design solution where glass alone cannot meet the personal safety requirements or specific threat levels in high risk locations.

Installation considerations

- » Design a large enough air gap between the glass and TUFFAK sheet to accommodate sheet deflection due to wind or attack load.
- » Wind load is not an issue for interior over-glazing, so a thinner sheet may be an option.
- » The framing must be designed to match the performance of the glazing and appropriate to the threat level of the application
- » Clean sash to be certain it is free of manufacturing contaminants such as cutting oil
- » Ensure sash is smooth and free of burrs
- » Confirm size of sash opening and verify a proper design edge engagement, and expansion/contraction allowances
- » Clean and inspect sheet edges for damage after cutting to size
- » Use a glazing gasket, tape or sealant recommended for polycarbonate with an adequate elongation

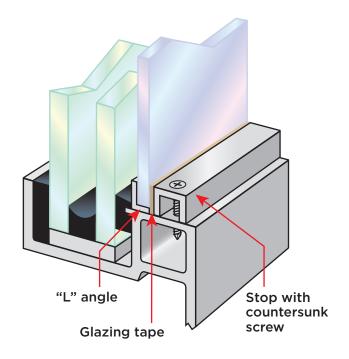

TECH TIP:

To ensure a proper window seal, follow the manufacturer's recommendation for seal compression. As a general rule, 15%-40% impression is adequate for most applications. Over compressing a gasket applies unnecessary stress to the polycarbonate and can lead to product failure.

Selected gaskets, silicone, tape and framing extrusions

GASKET

Tremco - EPDM/ Neoprene:

https://www.tremcosealants.com/markets/industrial/oem/extruded-products/trempro-epdm/

SILICONE

Dow-Corning - 795/995

http://www.dowcorning.com/applications/search/default.aspx?R=501EN

Momentive - SCS 2700, SCS1200, SCS 1700, SCS 1800, SCS 2000, SCS 2350, SCS 2800 http://www.siliconeforbuilding.com

TAPE

Saint-Gobain - V2100

https://www.tapesolutions.saint-gobain.com/products/thermalbond-spacer-tape

Tremco - Polyshim

https://www.tremcosealants.com/markets/commercial/commercial-glazing-systems/glazing-tapes/polyshim-ii-tape/

FRAMING EXTRUSIONS


https://eagle-aluminum.com/?gclid=EAlaIQobChMIsNP4mbbI9AIVif_ICh2BWQPoEAAYASAAEgLxn_D_BwE

TUFFAK sheet and Hygard® laminate products

Thickness (inch)	Light Transmission,	3	Solar Heat Gain		Solar Absorption	Solar Reflectance	U-Factor	
(IIICII)	Typical %	Coemicient	Coefficient	Joiai	%	%	Summer	Winter
0.118	86	0.99	0.87	83	11	6	0.91	1.00
0.177	85	0.99	0.86	82	12	6	0.88	0.96
0.236	84	0.97	0.85	80	14	6	0.85	0.92
0.370	80	0.95	0.83	77	17	6	0.78	0.85
0.480	77	0.93	0.81	75	16	9	0.73	0.79
Tint	70	0.86	0.75	66	27	7	*	*
Tint	50	0.77	0.67	55	38	7	*	*
Tint	18	0.62	0.54	34	60	6	*	*
BR750	89	0.95	0.83	75	19	6	0.64	0.68
BR1000	66	0.88	0.76	65	30	5	0.56	0.60
BR1250	72	0.91	0.79	68	27	5	0.51	0.54
CG375	82	0.94	0.82	76	18	6	0.77	0.84
CG500	79	0.93	0.81	73	21	6	0.72	0.78
CG750	72	0.90	0.79	69	25	6	0.63	0.68
WG 0.75**	71	0.89	0.78	69	23	8	0.62	0.67
WG 1.0**	64	0.86	0.75	64	29	7	0.56	0.60
WG 1.25**	59	0.85	0.74	61	32	7	0.50	0.53
WG 2.0**	48	0.82	0.71	55	39	6	0.39	0.41

^{*}Thickness dependent

^{**}WG products have limited weathering properties, for more information contact your Plaskolite representative or the Sheet Technical Services Group

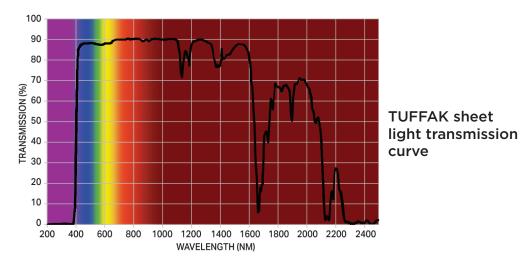

Noise reduction*

The tables below show sound reduction levels, in decibels, for TUFFAK sheet single and dual glazed systems.

SINGLE GLAZED

TUFFAK thickness (inch)	Rw (dB)	STC (dB)	OITC (dB)
0.118	24	24	19
0.177	27	27	22
0.236	29	29	24
0.375	33	33	27
0.500	35	34	30

DUAL GLAZED

(inch)	(inch)	thickness (inch)	(dB)	(dB)
0.236 PC	0.5	0.236	28	23
0.250 Glass	0.5	0.5	31	26
0.250 Glass	0.5	0.5 laminate	36	28

^{*}STC Sound Transmission Class; Rw Weighted Sound Reduction Index; OITC Outdoor/Indoor transmission Class; ASTM E 90

NOTES

NOTES

PLASKOLITE

A GLOBAL LEADER IN THE PRODUCTION OF THERMOPLASTIC SHEET

FOUNDED IN 1950

Our Mission: to deliver superior thermoplastic sheet, coatings and polymers to the world, through long-lasting customer relationships and hands-on customer service.

MANUFACTURING LOCATIONS



From our founding, PLASKOLITE strives to treat our employees, our customers, our community and the world, with kindness, dignity and respect. This drives our continuing effort to create sustainable products, in a sustainable manner, for future generations. This on-going commitment is expressed in the

PLASKOLITE Sustainable Ecosystem:

QUICK FACTS

STATUS: Privately held

GLOBAL HEADQUARTERS: Columbus, OH

EMPLOYEES: 1800 Worldwide

MARKETS SERVED: Signage, Lighting, Retail Display, Construction, Transportation, Security, Bat & Spa, Industrial, Architecture, Green Houses

OUR PILLARS OF SUSTAINABILITY

EACH CONTRIBUTES TO MAKING THE WORLD A BETTER PLACE



WHAT WE MAKE Versatile, high-quality, durable

thermoplastic materials...not single-use

plastics

HOW IT'S MADE How we make our products reflects

our overall philosophy of continuous

environmental improvement

HOW IT'S USED Our thermoplastics play an important

role in advancing human well-being, energy conservation and quality of life

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

